

Thrust Bearing Swivels

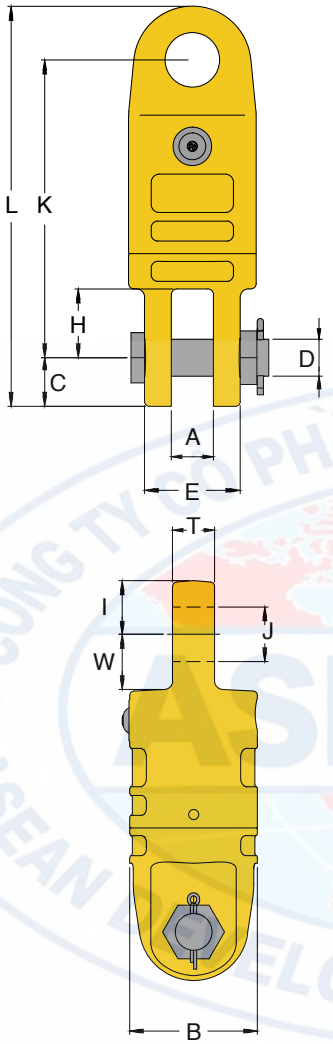

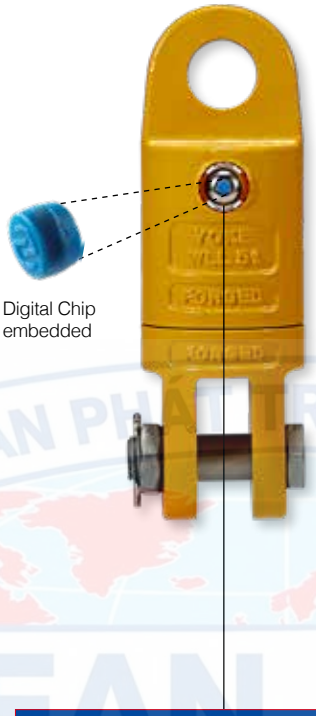

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- YOKE's Thrust Roller Bearing Swivels are manufactured using the highest grade of material available.
- YOKE's Thrust Roller Bearing Swivels are designed with a safety factor of 5:1.
- YOKE's Thrust Roller Bearing Swivels are available in sizes from 3 to 10 tons.
- YOKE's Thrust Roller Bearing Swivels are available for wire line 13mm to 22mm.
- YOKE's Thrust Roller Bearing Swivels are coated for corrosion resistance and longer service life.
- YOKE's Thrust Roller Bearing Swivels are manufactured with grease fitting for superior performance.
- YOKE's Thrust Roller Bearing Swivels are designed for low starting torque and high rotation speed.
- All parts of YOKE's Thrust Roller Bearing Swivels are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times the working load limit.
- All parts of YOKE's Thrust Roller Bearing Swivels come with a batch number for quality certification and traceability.

8-325 Eye & Jaw

Thrust Roller Bearing Swivels

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)												N.W.
	mm	tonnes*	A	B	C	D	E	H	I	J	K	L	T	W	kg
8-325-03	13	3.0	22.5	70	25.5	19.0	41.5	33.5	32	26.0	152	210	19	30.0	3.5
8-325-05	16	5.0	25.0	76	29.0	22.0	57.0	41.0	32	32.5	178	239	25	33.0	5.2
8-325-085	19	8.5	40.0	102	35.0	25.4	72.0	54.0	38	35.8	216	289	32	42.6	10.2
8-325-10	22	10.0	44.0	114	44.0	38.0	86.0	89.0	48	43.0	299	391	43	72.0	18.3

* Design factor 5:1
Proof load is 2 times the WLL.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT