


Thrust Bearing Swivels

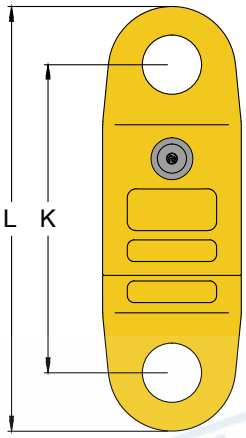

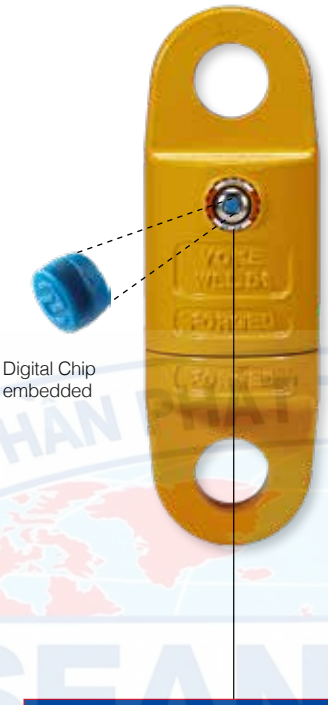

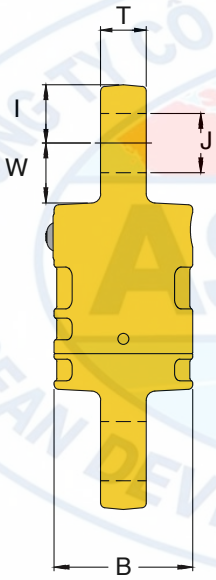

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- YOKE's Thrust Roller Bearing Swivels are manufactured using the highest grade of material available.
- YOKE's Thrust Roller Bearing Swivels are designed with a safety factor of 5:1.
- YOKE's Thrust Roller Bearing Swivels are available in sizes from 3 to 10 tons.
- YOKE's Thrust Roller Bearing Swivels are available for wire line 13mm to 22mm.
- YOKE's Thrust Roller Bearing Swivels are coated for corrosion resistance and longer service life.
- YOKE's Thrust Roller Bearing Swivels are manufactured with grease fitting for superior performance.
- YOKE's Thrust Roller Bearing Swivels are designed for low starting torque and high rotation speed.
- All parts of YOKE's Thrust Roller Bearing Swivels are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times the working load limit.
- All parts of YOKE's Thrust Roller Bearing Swivels come with a batch number for quality certification and traceability.

8-326 Eye & Eye

Thrust Roller Bearing Swivels

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)							N.W.
	mm	tonnes*	B	I	J	K	L	T	W	kg
8-326-03	13	3.0	70	32	26.0	148	212	19	30.0	3.4
8-326-05	16	5.0	76	32	32.5	169	233	25	33.0	4.6
8-326-085	19	8.5	102	38	35.8	206	282	32	42.6	9.8
8-326-10	22	10.0	114	48	43.0	285	381	43	72.0	16.9

* Design factor 5:1
Proof load is 2 times the WLL.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.