

Thrust Bearing Swivels

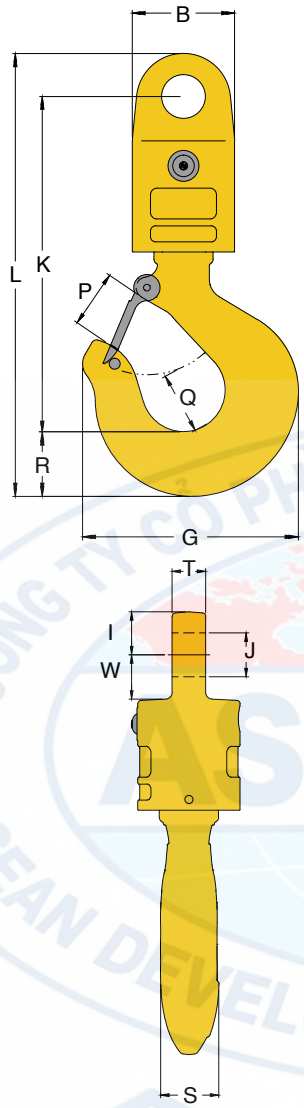

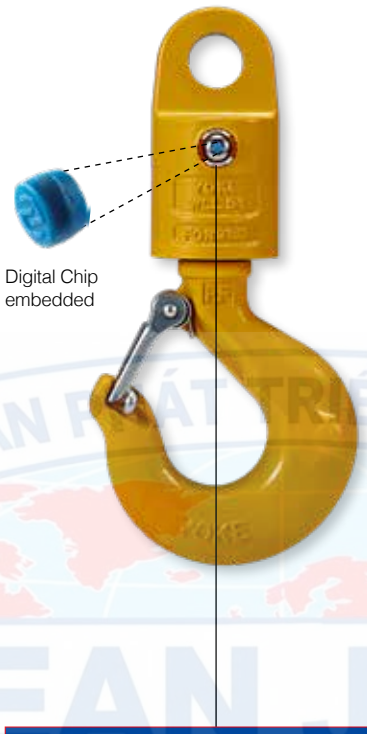

- YOKE's Thrust Roller Bearing Swivels are manufactured using the highest grade of material available.
- YOKE's Thrust Roller Bearing Swivels are designed with a safety factor of 5:1.
- YOKE's Thrust Roller Bearing Swivels are available in sizes from 3 to 10 tons.
- YOKE's Thrust Roller Bearing Swivels are available for wire line 13mm to 22mm.
- YOKE's Thrust Roller Bearing Swivels are coated for corrosion resistance and longer service life.
- YOKE's Thrust Roller Bearing Swivels are manufactured with grease fitting for superior performance.
- YOKE's Thrust Roller Bearing Swivels are designed for low starting torque and high rotation speed.
- All parts of YOKE's Thrust Roller Bearing Swivels are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times the working load limit.
- All parts of YOKE's Thrust Roller Bearing Swivels come with a batch number for quality certification and traceability.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

8-327 Eye & Hook

Thrust Roller Bearing Swivels

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)												N.W.
	mm	tonnes*	B	G	I	J	K	L	P	Q	R	S	T	W	kg
8-327-03	13	3.0	70	122	32	26.0	208	277	36	38	36	33	19	30.0	4.0
8-327-05	16	5.0	76	160	32	32.5	249	329	43	49	47	42	25	33.0	6.7
8-327-085	19	8.5	102	196	38	35.8	300	396	61	62	58	48	32	42.6	12.6
8-327-10	22	10.0	114	221	48	43.0	350	464	62	65	66	56	43	72.0	19.5

* Design factor 5:1
Proof load is 2 times the WLL.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT