

Thrust Bearing Swivels



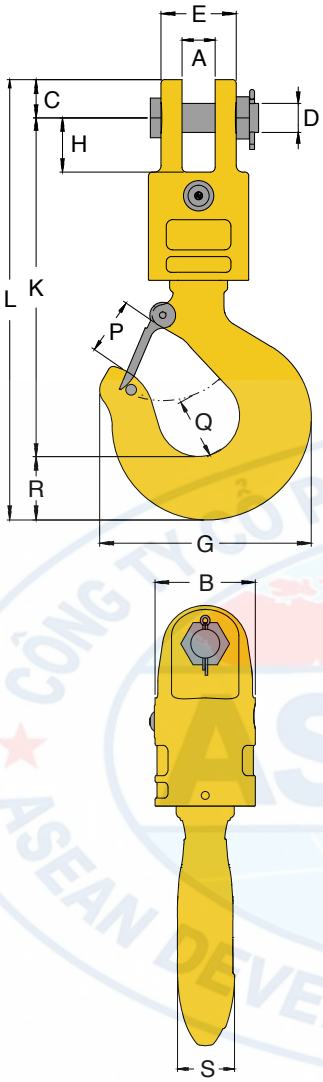

- YOKE's Thrust Roller Bearing Swivels are manufactured using the highest grade of material available.
- YOKE's Thrust Roller Bearing Swivels are designed with a safety factor of 5:1.
- YOKE's Thrust Roller Bearing Swivels are available in sizes from 3 to 10 tons.
- YOKE's Thrust Roller Bearing Swivels are available for wire line 13mm to 22mm.
- YOKE's Thrust Roller Bearing Swivels are coated for corrosion resistance and longer service life.
- YOKE's Thrust Roller Bearing Swivels are manufactured with grease fitting for superior performance.
- YOKE's Thrust Roller Bearing Swivels are designed for low starting torque and high rotation speed.
- All parts of YOKE's Thrust Roller Bearing Swivels are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times the working load limit.
- All parts of YOKE's Thrust Roller Bearing Swivels come with a batch number for quality certification and traceability.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

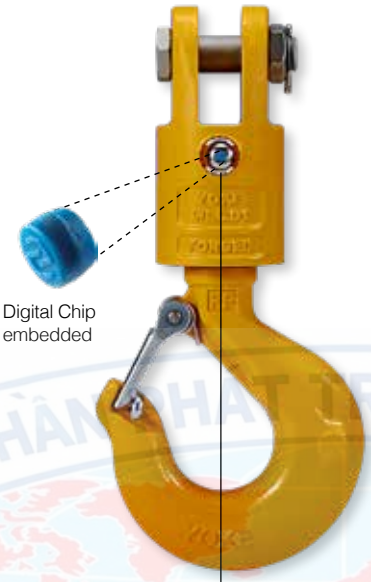

8-328 Jaw & Hook

Thrust Roller Bearing Swivels

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)													N.W.
	mm	tonnes*	A	B	C	D	E	G	H	K	L	P	Q	R	S	kg
8-328-03	13	3.0	22.5	70	25.5	19.0	41.5	122	33.5	212	275	36	38	36	33	4.1
8-328-05	16	5.0	25.0	76	29.0	22.0	57.0	160	41.0	257	334	43	49	47	42	7.2
8-328-085	19	8.5	40.0	102	35.0	25.4	72.0	196	54.0	311	404	61	62	58	48	13.1
8-328-10	22	10.0	44.0	114	44.0	38.0	86.0	221	89.0	365	475	62	65	66	56	20.9

* Design factor 5:1
Proof load is 2 times the WLL.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.