
Angular Contact Bearing Swivels



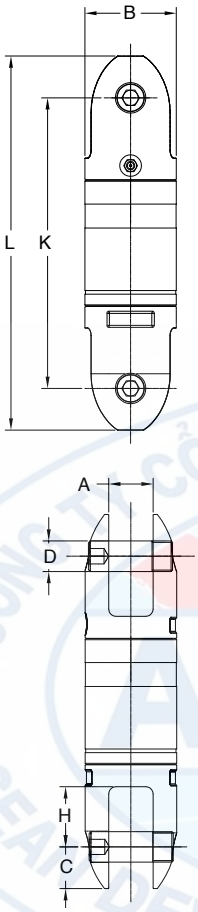

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- YOKE Swivels are manufactured using the highest grade of material available.
- YOKE Swivels are designed with a safety factor of 5:1.
- YOKE Swivels are available in sizes from 0.75 tonnes to 25 tonnes.
- YOKE Swivels are available for wire lines 6mm to 32 mm.
- YOKE Swivels are zinc plated for corrosion resistance and longer life.
- YOKE Swivels are manufactured with grease fittings for superior performance.
- YOKE Swivels are designed for low starting torque and high rotation speed.
- All Swivels parts are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times working load limit.
- All parts with batch number for quality certified and traceability.
- Digital Chip embedded with Certificate.

Angular Contact Bearing Swivels - Bullet Style

Item No.	Wire Line Size	Working Load Limit	Dimensions (mm)							N.W.
	mm	tonnes*	A	B	C	D	H	K	L	kg
8-301-0075	6	0.75	15	32	12	10	22	103	126	0.5
8-301-015	10	1.50	13	41	14	11	21	103	132	0.8
8-301-03	13	3.00	19	51	21	16	24	138	179	1.7
8-301-05	16	5.00	25	64	29	22	40	200	259	4.0
8-301-085	19	8.50	33	76	32	25	54	249	313	6.0
8-301-10	22	10.00	44	102	44	38	83	337	425	18.2
8-301-15	25	15.00	48	108	46	38	56	317	408	21.0
8-301-25	32	25.00	62	132	61	51	69	374	495	36.5

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT