
Angular Contact Bearing Swivels



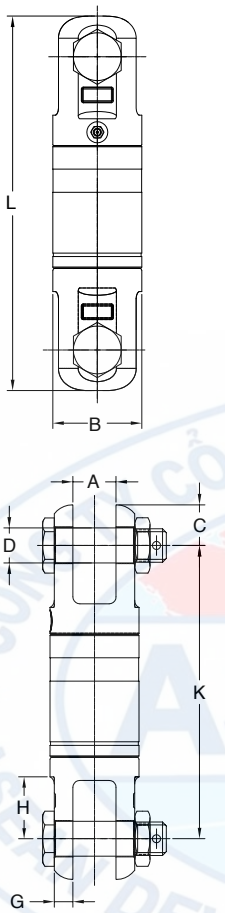

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- YOKE Swivels are manufactured using the highest grade of material available.
- YOKE Swivels are designed with a safety factor of 5:1.
- YOKE Swivels are available in sizes from 0.75 tonnes to 25 tonnes.
- YOKE Swivels are available for wire lines 6mm to 32 mm.
- YOKE Swivels are zinc plated for corrosion resistance and longer life.
- YOKE Swivels are manufactured with grease fittings for superior performance.
- YOKE Swivels are designed for low starting torque and high rotation speed.
- All Swivels parts are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times working load limit.
- All parts with batch number for quality certified and traceability.

Angular Contact Bearing Swivels - Jaw + Jaw

Item No.	Wire Line Size	Working Load Limit	Dimensions (mm)								N.W.
	mm	tonnes*	A	B	C	D	G	H	K	L	kg
8-303-0075	6	0.75	15	32	13	10	6	22	103	128	0.50
8-303-015	10	1.50	13	41	18	13	8	20	103	138	0.90
8-303-03	13	3.00	19	51	24	19	10	30	159	206	2.20
8-303-05	16	5.00	25	64	29	22	14	40	200	259	4.35
8-303-085	19	8.50	40	76	34	30	14	54	249	317	7.20
8-303-10	22	10.00	44	102	45	38	21	89	356	445	18.00
8-303-15	25	15.00	48	108	52	38	25	57	316	420	21.70
8-303-25	32	25.00	62	132	65	51	30	70	374	503	39.50

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.