

Angular Contact Bearing Swivels

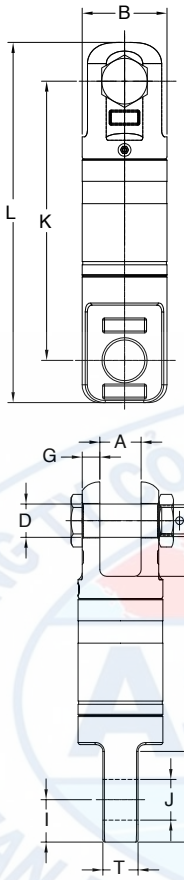

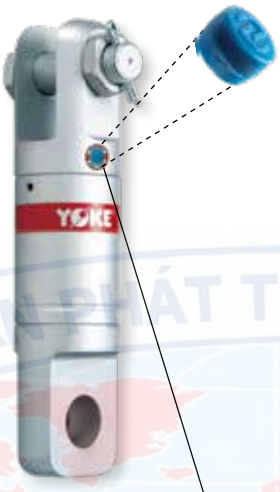

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- YOKE Swivels are manufactured using the highest grade of material available.
- YOKE Swivels are designed with a safety factor of 5:1.
- YOKE Swivels are available in sizes from 0.75 tonnes to 25 tonnes.
- YOKE Swivels are available for wire lines 6mm to 32 mm.
- YOKE Swivels are zinc plated for corrosion resistance and longer life.
- YOKE Swivels are manufactured with grease fittings for superior performance.
- YOKE Swivels are designed for low starting torque and high rotation speed.
- All Swivels parts are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times working load limit.
- All parts with batch number for quality certified and traceability.

Angular Contact Bearing Swivels - Jaw + Eye

Item No.	Wire Line Size	Working Load Limit	Dimensions (mm)											N.W.
	mm	tonnes*	A	B	D	G	H	I	J	K	L	T	W	kg
8-304-0075	6	0.75	15	32	10	6	22	18	19	103	134	12	37	0.5
8-304-015	10	1.50	13	41	13	8	20	16	17	104	138	13	34	0.9
8-304-03	13	3.00	19	51	19	10	30	25	23	157	206	19	47	2.1
8-304-05	16	5.00	25	64	22	14	40	30	33	199	259	25	61	4.1
8-304-085	19	8.50	40	76	30	14	54	38	36	243	315	32	78	7.1
8-304-10	22	10.00	44	102	38	21	89	46	42	354	445	44	121	17.6
8-304-15	25	15.00	48	108	38	25	57	64	54	317	434	49	110	21.6
8-304-25	32	25.00	62	132	51	30	70	70	66	390	524	60	130	39.7

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT