

Angular Contact Bearing Swivels



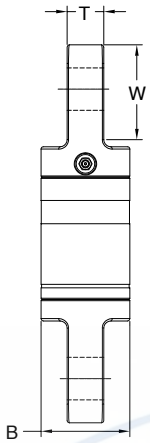

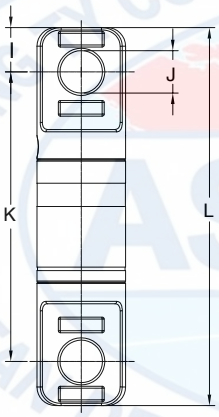

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- YOKE Swivels are manufactured using the highest grade of material available.
- YOKE Swivels are designed with a safety factor of 5:1.
- YOKE Swivels are available in sizes from 0.75 tonnes to 25 tonnes.
- YOKE Swivels are available for wire lines 6mm to 32 mm.
- YOKE Swivels are zinc plated for corrosion resistance and longer life.
- YOKE Swivels are manufactured with grease fittings for superior performance.
- YOKE Swivels are designed for low starting torque and high rotation speed.
- All Swivels parts are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times working load limit.
- All parts with batch number for quality certified and traceability.

Angular Contact Bearing Swivels - Eye + Eye

Item No.	Wire Line Size	Working Load Limit	Dimensions (mm)							N.W.
	mm	tonnes*	B	I	J	K	L	T	W	kg
8-306-0075	6	0.75	32	18	19	103	139	12	37	0.50
8-306-015	10	1.50	41	16	17	105	137	13	34	0.86
8-306-03	13	3.00	51	25	23	156	207	19	47	1.98
8-306-05	16	5.00	64	30	33	198	259	25	61	3.83
8-306-085	19	8.50	76	38	36	236	313	32	78	7.10
8-306-10	22	10.00	102	46	42	353	445	44	121	16.50
8-306-15	25	15.00	108	64	54	316	443	49	110	21.00
8-306-25	32	25.00	132	70	66	407	547	59	145	39.00

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT