

Angular Contact Bearing Swivels

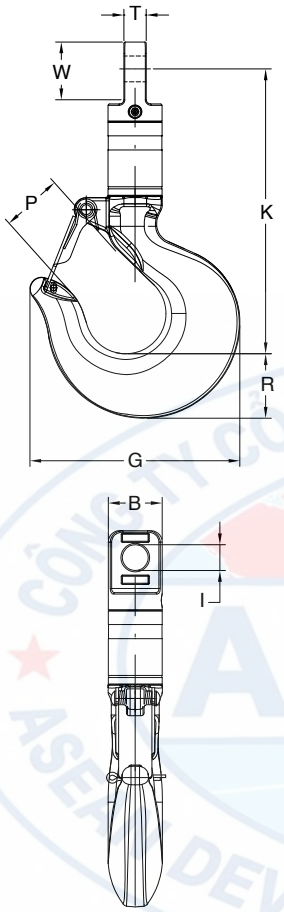

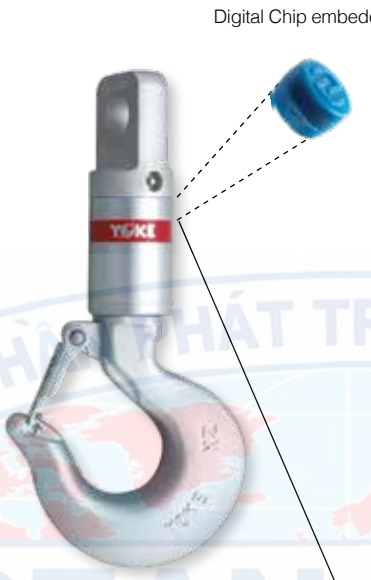

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- YOKE Swivels are manufactured using the highest grade of material available.
- YOKE Swivels are designed with a safety factor of 5:1.
- YOKE Swivels are available in sizes from 0.75 tonnes to 25 tonnes.
- YOKE Swivels are available for wire lines 6mm to 32 mm.
- YOKE Swivels are zinc plated for corrosion resistance and longer life.
- YOKE Swivels are manufactured with grease fittings for superior performance.
- YOKE Swivels are designed for low starting torque and high rotation speed.
- All Swivels parts are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times working load limit.
- All parts with batch number for quality certified and traceability.

Angular Contact Bearing Swivels - Eye + Hook

Item No.	Wire Line Size	Working Load Limit	Dimensions (mm)								N.W.
	mm	tonnes*	B	G	I	K	P	R	T	W	kg
8-307-0075	6	0.75	32	80	18	157	25	21	10	40	0.7
8-307-015	10	1.50	41	102	16	163	30	29	13	34	1.3
8-307-03	13	3.00	51	122	25	223	36	36	19	47	2.9
8-307-05	16	5.00	64	160	30	278	43	47	25	61	5.7
8-307-085	19	8.50	76	221	38	331	62	66	32	78	10.6
8-307-10	22	10.00	102	277	46	441	81	76	44	121	23.5
8-307-15	25	15.00	108	277	54	485	81	76	49	124	28.9
8-307-25	32	25.00	132	353	66	583	83	92	59	145	54.5

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.