

Angular Contact Bearing Swivels

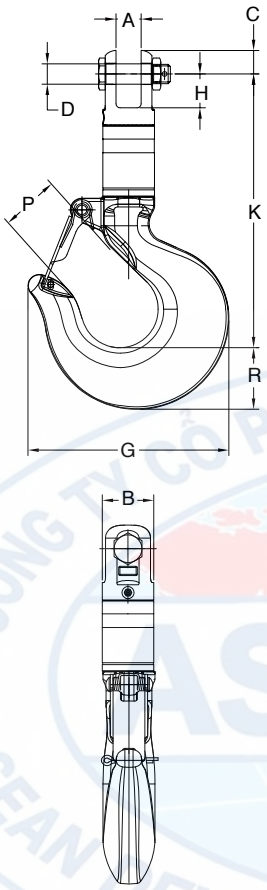

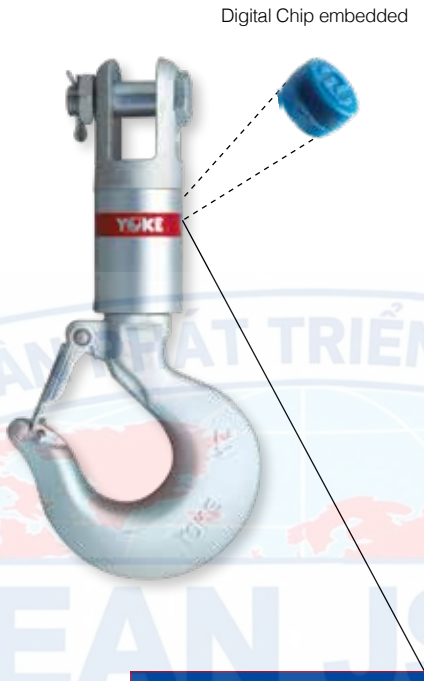

- YOKE Swivels are manufactured using the highest grade of material available.
- YOKE Swivels are designed with a safety factor of 5:1.
- YOKE Swivels are available in sizes from 0.75 tonnes to 25 tonnes.
- YOKE Swivels are available for wire lines 6mm to 32 mm.
- YOKE Swivels are zinc plated for corrosion resistance and longer life.
- YOKE Swivels are manufactured with grease fittings for superior performance.
- YOKE Swivels are designed for low starting torque and high rotation speed.
- All Swivels parts are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times working load limit.
- All parts with batch number for quality certified and traceability.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Angular Contact Bearing Swivels - Jaw + Hook

Item No.	Wire Line Size	Working Load Limit	Dimensions (mm)									N.W.
	mm	tonnes*	A	B	C	D	G	H	K	P	R	kg
8-308-0075	6	0.75	15	32	13	10	80	22	139	25	21	0.7
8-308-015	10	1.50	13	41	18	13	102	20	162	30	29	1.1
8-308-03	13	3.00	19	51	24	19	122	30	225	36	36	3.0
8-308-05	16	5.00	25	64	29	22	160	40	279	43	47	5.7
8-308-085	19	8.50	40	76	34	30	221	54	337	62	66	12.1
8-308-10	22	10.00	44	102	45	38	277	89	442	81	76	24.3
8-308-15	25	15.00	48	108	52	38	277	56	421	81	76	28.9
8-308-25	32	25.00	62	132	65	51	353	69	496	83	92	56.6

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT