


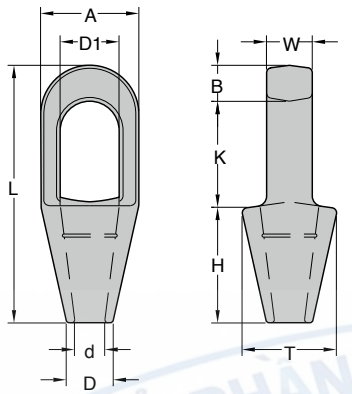

- YOKE Spelter Sockets are forged steel sockets through 38mm.
- YOKE Spelter Sockets properly applied have an efficiency rating of 100% based on the catalog strength of wire rope.
- Socket size 6mm to 20mm use one groove, 22mm to 38mm use 2 grooves.
- Closed Spelter sockets meet the performance requirements of Federal Specification RR-S-550E ,Type B.
- Galvanized finish or self colored.

In accordance with ASME B30.9, all assembly slings with poured spelter shall be proof loaded.

Forged Closed Spelter Wire Rope Socket

Item No.		Rope Dia.	Structural Strand Dia.	Ultimate Load	Dimensions (mm)										N.W.
S.C.*	Galvanized	mm	mm	tonnes	A	B	D	D1	d	H	K	L	T	W	kg
8-735-06	8-735-06G	6 - 7	-	8	38	13	18	22	11	57	44	114	38	13	0.3
8-735-10	8-735-10G	8 - 10	-	12	43	16	21	25	13	57	51	124	43	18	0.4
8-735-13	8-735-13G	11 - 13	-	20	51	18	25	30	14	64	57	138	50	22	0.7
8-735-16	8-735-16G	14 - 16	13	30.8	67	21	28	36	18	76	64	160	63	25	1.2
8-735-19	8-735-19G	18 - 20	14 - 16	43.5	76	27	32	41	21	89	76	192	70	32	2.0
8-735-22	8-735-22G	22 - 23	18 - 20	65.3	92	32	38	48	24	101	89	222	88	38	3.6
8-735-26	8-735-26G	24 - 26	22 - 23	81.6	104	35	45	58	29	114	102	251	96	45	4.9
8-735-28	8-735-28G	28 - 30	24 - 25	100	114	38	51	65	32	127	114	279	105	50	7.2
8-735-36	8-735-36G	32 - 35	26 - 28	136	135	41	57	71	38	140	127	308	121	57	10.5
8-735-38	8-735-38G	36 - 38	30 - 32	170	135	49	70	81	41	152	152	354	133	64	14.3

* S.C. = Self Colored.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT