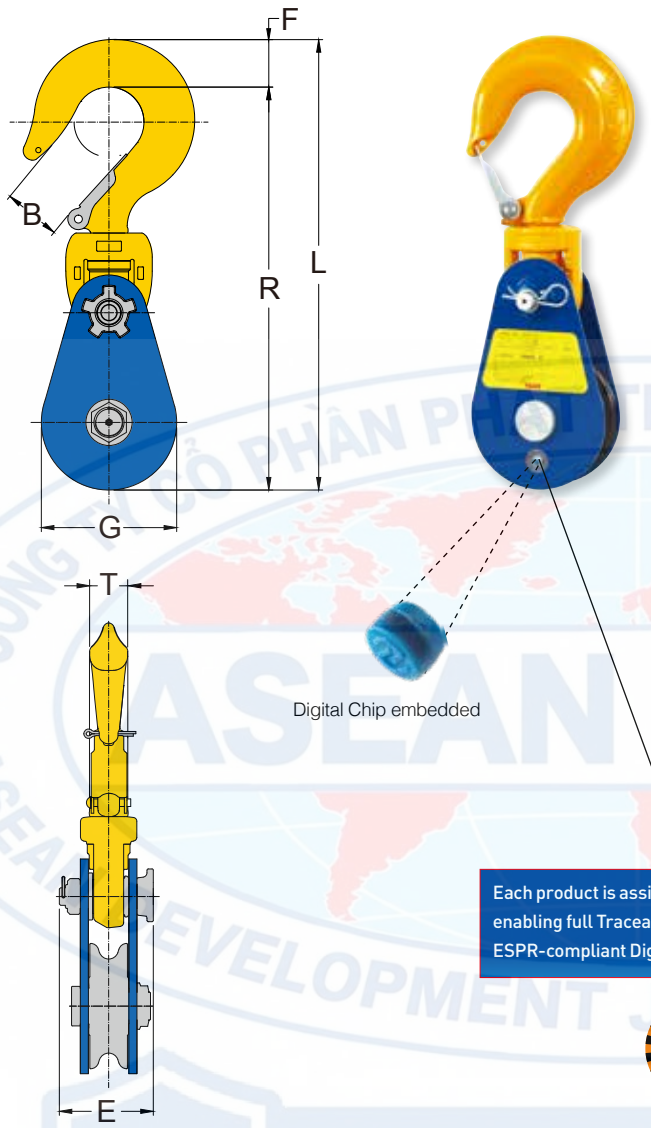



- YOKE Super Snatch Blocks are manufactured of the highest quality tensile steel.
- Available for 20 tonnes, for wire rope sizes 25mm to 29 mm.
- Part number, wire rope size and working load limit are marked on each block.
- Permanent traceability code link to test certificates for easy traceability.
- Supplied with bronze bushings and pressure lube fittings.
- Meets or exceeds all requirements of ASME B30.26.
- Safety factor 4:1
- Fatigue rated

# Super Snatch Block with Hook

| Item No. | Sheave Dia. | Bearing Type | Wire Rope Size | Working Load Limit | Dimensions | | | | | | | N.W. | Replacement Sheave |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | B | E | F | G | L | R | T | | |
| | mm | | mm | tonnes | mm | | | | | | | kg | |
| **8-552-20** | 203 | **BB | 25-29 | 20 | 79 | 157 | 76 | 216 | 719 | 643 | 61 | 41 | 8-500-20 |
| **8-552-2010** | 254 | BB | 25-29 | 20 | 79 | 157 | 76 | 280 | 826 | 750 | 61 | 53 | 8-500-2010 |
| **8-552-2012-25** | 305 | BB | 25 | 20 | 79 | 157 | 76 | 330 | 881 | 805 | 61 | 63 | 8-500-2012-25 |
| **8-552-2012-29** | 305 | BB | 29 | 20 | 79 | 157 | 76 | 330 | 881 | 805 | 61 | 63 | 8-500-2012-29 |

* Minimum Ultimate Load is 4 times the Working Load Limit.

** BB: Bronze Bushing

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.



**WARNING**
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT