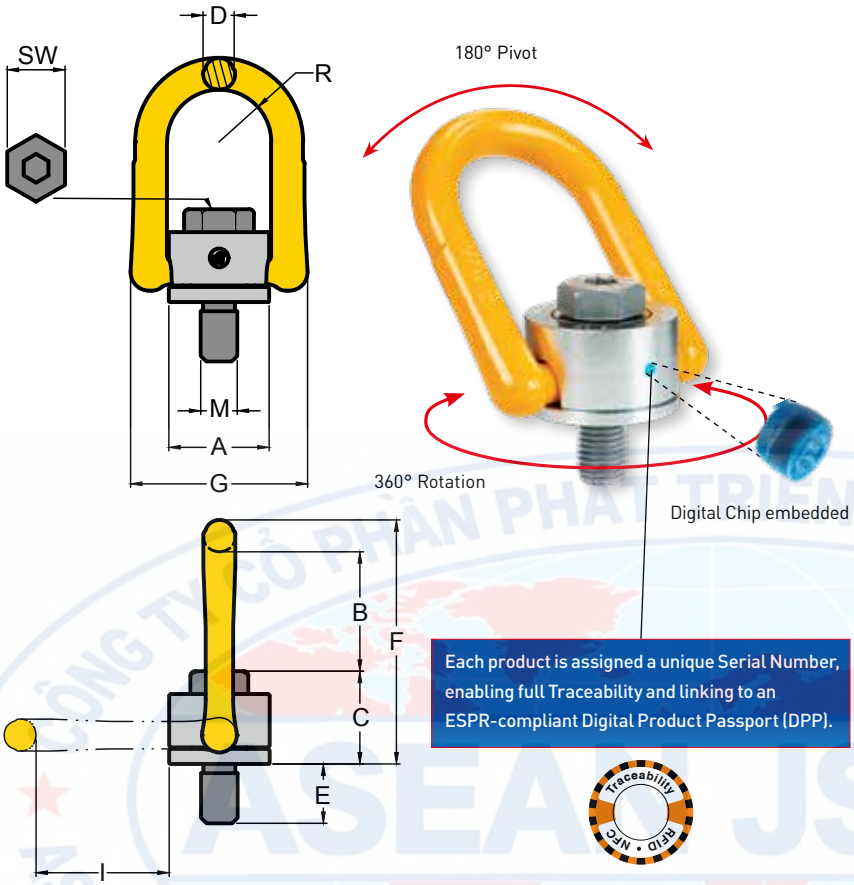



- Rotates through 360° and pivots 180°, and simultaneously allows lifting from any direction.
- Manufactured from forged alloy steel, quenched and tempered.
- Tested in accordance with EN 1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

» China Patent: ZL 2012 1 0131962.1
» Taiwan Patent: I468602

# Anchor Point

## Metric Thread (8-231)

| Item No. | Working Load Limit | Thread version | | | Dimensions | | | | | | | | | Torque in | N.W. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | M | E | Pitch | A | B | C | D | F | G | R | SW | I | | |
| | tonnes | mm | mm | DIN13 | | | | | mm | | | | | Nm | kg |
| 8-231-005 | 0.5 | M 8 | 12 | 1.25 | 33 | 42 | 28 | 11 | 80 | 58 | 17 | 13 | 44 | 30 | 0.2 |
| 8-231-007 | 0.7 | M10 | 15 | 1.50 | 33 | 41 | 29 | 11 | 80 | 58 | 17 | 17 | 44 | 60 | 0.3 |
| 8-231-010 | 1.0 | M12 | 20 | 1.75 | 33 | 39 | 31 | 11 | 80 | 58 | 17 | 19 | 44 | 100 | 0.3 |
| 8-231-015 | 1.5 | M14 | 21 | 2.00 | 50 | 56 | 45 | 17 | 116 | 90 | 27 | 22 | 63 | 120 | 0.9 |
| 8-231-020 | 2.0 | M16 | 24 | 2.00 | 50 | 54 | 46 | 17 | 116 | 90 | 27 | 24 | 63 | 150 | 0.9 |
| 8-231-025 | 2.5 | M18 | 27 | 2.50 | 65 | 77 | 57 | 20 | 155 | 108 | 34 | 30 | 86 | 200 | 1.9 |
| 8-231-030 | 3.0 | M20 | 34 | 2.50 | 51 | 52 | 49 | 17 | 116 | 90 | 27 | 30 | 63 | 250 | 1.1 |
| 8-231-050 | 5.0 | M24 | 36 | 3.00 | 72 | 81 | 59 | 25 | 163 | 126 | 37 | 36 | 88 | 400 | 2.7 |
| 8-231-056 | 5.6 | M27 | 38 | 3.00 | 87 | 96 | 79 | 30 | 204 | 148 | 46 | 41 | 110 | 400 | 4.7 |
| 8-231-078 | 7.8 | M30 | 48 | 3.50 | 87 | 94 | 81 | 30 | 204 | 148 | 46 | 46 | 110 | 500 | 5.1 |
| 8-231-100 | 10.0 | M36 | 54 | 4.00 | 87 | 90 | 85 | 30 | 204 | 148 | 46 | 55 | 110 | 1,000 | 5.6 |
| 8-231-125 | 12.5 | M36 | 56 | 4.00 | 110 | 112 | 98 | 36 | 248 | 188 | 57 | 55 | 128 | 1,000 | 10.2 |
| 8-231-156 | 15.6 | M42 | 63 | 4.50 | 110 | 101 | 108 | 36 | 248 | 188 | 57 | 65 | 128 | 1,500 | 10.6 |
| 8-231-200 | 20.0 | M48 | 72 | 5.00 | 110 | 97 | 112 | 36 | 248 | 188 | 57 | 75 | 128 | 2,000 | 12.0 |
| 8-231-220 | 22.0 | M56 | 84 | 5.50 | 123 | 116 | 121 | 36 | 274 | 202 | 64 | 85 | 146 | 2,100 | 14.3 |
| 8-231-225 | 22.5 | M64 | 100 | 6.00 | 123 | 111 | 126 | 36 | 274 | 202 | 64 | 95 | 146 | 2,200 | 16.6 |

* Design Factor 4:1

**WARNING**
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT



Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.