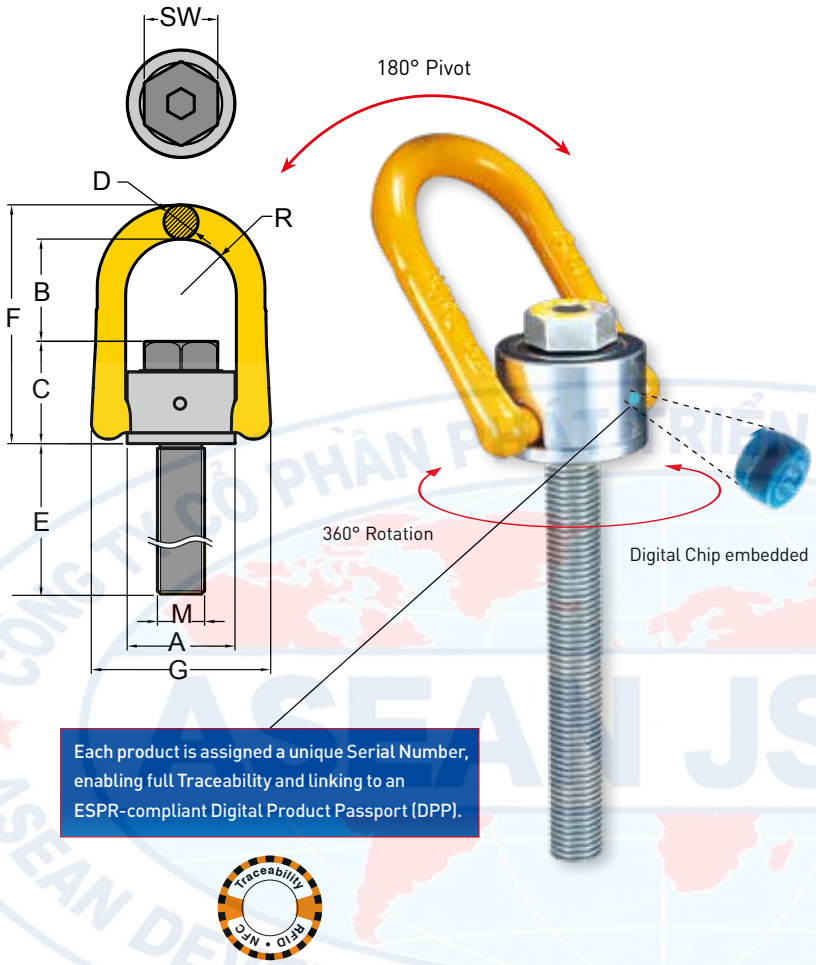


- Rotates through 360° and pivots 180°, and simultaneously allows lifting from any direction.
- Manufactured from forged alloy steel, quenched and tempered.
- Tested in accordance with EN 1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

» China Patent: ZL 2012 1 0131962.1
» Taiwan Patent: I468602

Anchor Point, Long Bolt

Metric Thread (8-231L)

Item No.	Working Load Limit	Thread version			Dimensions								Torque in	N.W.
		M	E	Pitch	A	B	C	D	F	G	R	SW		
	tonnes	mm	mm	DIN13	mm								Nm	kg
8-231-005/105L	0.5	M 8	83	1.25	33	42	28	11	80	58	17	13	30	0.3
8-231-007/125L	0.7	M10	103	1.50	33	41	29	11	80	58	17	17	60	0.4
8-231-010/150L	1.0	M12	128	1.75	33	39	31	11	80	58	17	19	100	0.4
8-231-020/185L	2.0	M16	149	2.00	50	54	46	17	116	90	27	24	150	1.0
8-231-030/230L	3.0	M20	194	2.50	51	52	49	17	116	90	27	30	250	2.0
8-231-050/265L	5.0	M24	222	3.00	72	81	59	25	163	126	37	36	400	2.8
8-231-078/340L	7.8	M30	278	3.50	87	94	81	30	204	148	46	46	500	6.3
8-231-125/300L	12.5	M36	226	4.00	110	112	98	36	248	188	57	55	1,000	10.6
8-231-156/350L	15.6	M42	268	4.50	110	101	108	36	248	188	57	65	1,500	11.3
8-231-200/385L	20.0	M48	303	5.00	110	97	112	36	248	188	57	75	2,000	13.3

* Design Factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.