
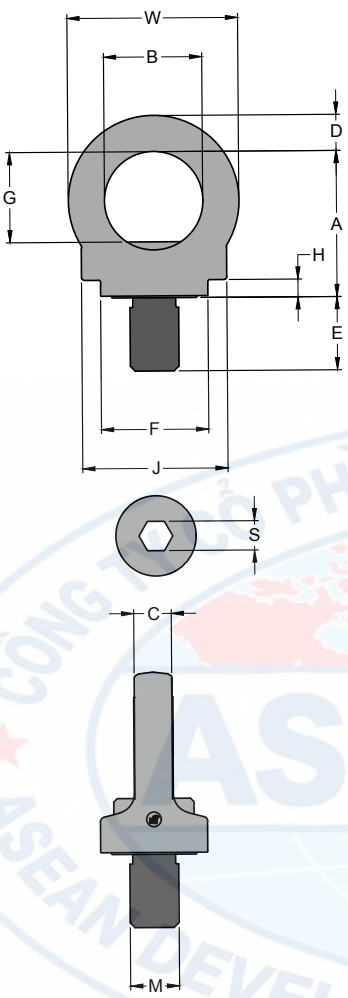


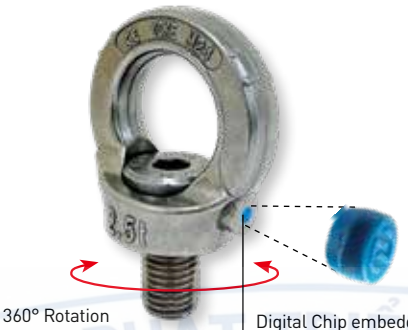

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Rotates through 360° adjustable in the direction of the load.
- Manufactured from stainless steel.
- Tested in accordance with EN 1677-1.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.
- Used in different applications such as chemical oil coal industries, food processing, clean room and precision instrument.

» Mexico Patent: 3423
» Japan Patent: 3192016

» China Patent: ZL 2012 1 0131962.1/ ZL 2014 2 0228663.4
» Taiwan Patent: I468602

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

Stainless Steel Eye Point

Metric Thread (8-S291)

Item No.	Working Load Limit	Thread version			Dimensions										Torque in	N.W.
		M	E	Pitch	A	B	C	D	F	G	H	J	S	W		
	tonnes	mm	mm	DIN13	mm										Nm	kg
8-S291-005	0.5	M12	18	1.75	45	30	10	11	33	29	5	44	8	52	10	0.2
8-S291-010	1.0	M16	24	2.00	52	35	14	13	35	33	5	51	10	61	30	0.3
8-S291-020	2.0	M20	30	2.50	60	40	16	15	44	37	7	60	12	70	70	0.6
8-S291-025	2.5	M24	36	3.00	72	49	19	18	52	46	10	72	14	84	150	1.0

* Design Factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.