
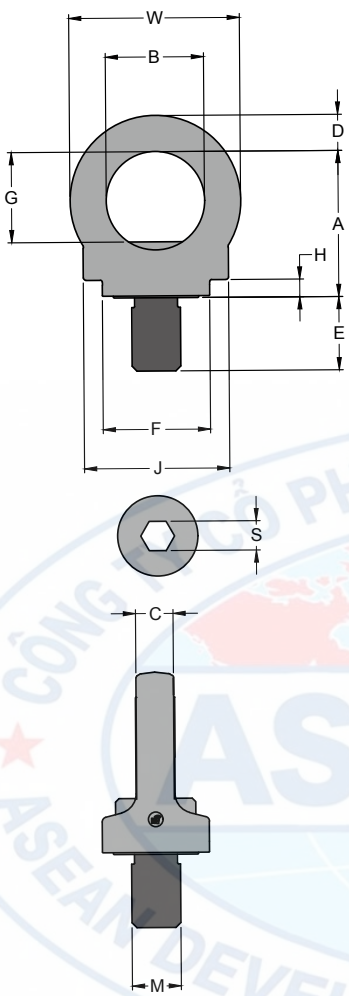




Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Rotates through 360° adjustable in the direction of the load.
- Manufactured from stainless steel.
- Tested in accordance with EN 1677-1.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are UNC thread.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.
- Used in different applications such as chemical oil coal industries, food processing, clean room and precision instrument.

» Mexico Patent: 3423
» Japan Patent: 3192016

» China Patent: ZL 2012 1 0131962.1/ ZL 2014 2 0228663.4
» Taiwan Patent: I468602

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

Stainless Steel Eye Point

UNC Thread (8-S292)

Item No.	Working Load Limit	Thread version			Dimensions										Torque in	N.W.
		M	E	TPI	A	B	C	D	F	G	H	J	S	W		
	lbs	inch	inch		inch										ft-lbs	lbs
8-S292-005	1,100	1/2	0.75	13UNC	1.77	1.18	0.39	0.43	1.30	1.14	0.2	1.73	0.31	0.31	7	0.4
8-S292-010	2,200	5/8	0.94	11UNC	2.05	1.38	0.55	0.51	1.38	1.30	0.2	2.01	0.39	0.39	20	0.7
8-S292-020	4,400	3/4	1.40	10UNC	2.36	1.57	0.63	0.59	1.73	1.46	0.28	2.36	0.47	0.47	50	1.3
8-S292-025	5,500	1	1.52	8UNC	2.83	1.93	0.75	0.71	2.05	1.81	0.39	2.83	0.55	0.55	110	2.2

* Design Factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.