

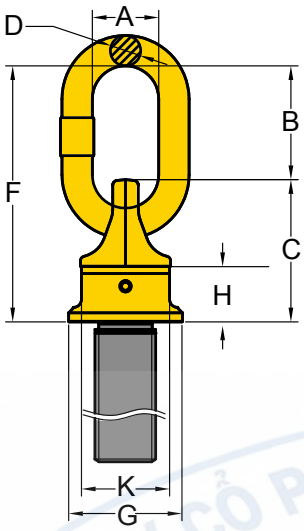


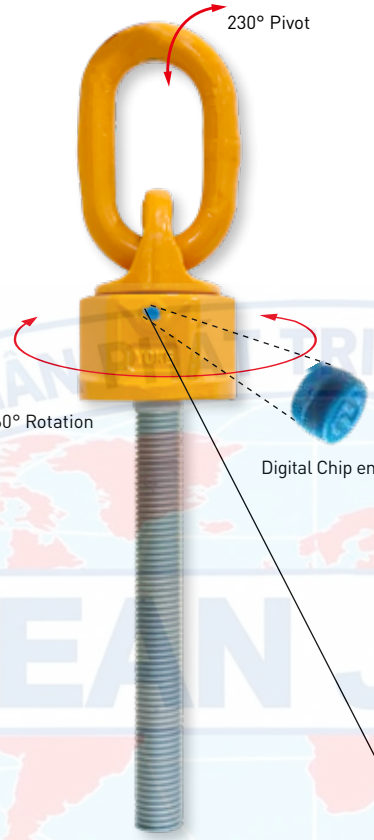

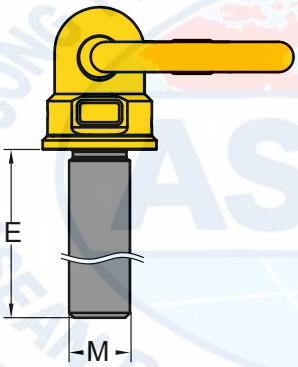

- Pivots to 230°, rotates through 360° due to its unique ball bearing design.
- Manufactured from forged alloy steel, quenched and tempered.
- Tested in accordance with EN 1677-1 and EN 1677-4.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and Traceability Code links to Test Certificate sheet.
- Bolts are Metric thread.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Easy to attach or dismantle due to the forged hexagon shaped body of the Swivel Point.
- Capable of rotating under load. Do not turn continuously in 90 degree direction at full load.

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Swivel Point, Long Bolt

Metric Thread (8-273)

NEW

Item No.	Working Load Limit	Thread version			Dimensions (mm)								Torque in	N.W.
		M	E	Pitch	G	C	K	H	F	D	B	A		
	tonnes	mm	mm	DIN13	mm								Nm	kg
8-273-003/108L	0.30	M 8	102	1.25	35	47.5	30	23.5	79.5	8	32	29	10	0.5
8-273-004/128L	0.45	M10	122	1.50	35	47.5	30	23.5	79.5	8	32	29	10	0.5
8-273-006/145L	0.60	M12	140	1.75	40	55.0	36	28.0	105.0	10	50	35	10	0.8
8-273-013/186L	1.30	M16	180	2.00	46	66.0	41	34.0	116.0	13	50	36	30	1.2
8-273-020/235L	2.00	M20	223	2.50	62	83.0	55	44.0	137.0	13	54	36	70	2.0
8-273-035/267L	3.50	M24	257	3.00	78	104.0	70	52.0	170.0	19	66	41	150	3.5
8-273-050/346L	5.00	M30	330	3.50	90	141.0	80	69.0	227.0	22	86	50	350	6.8

* Design Factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.