
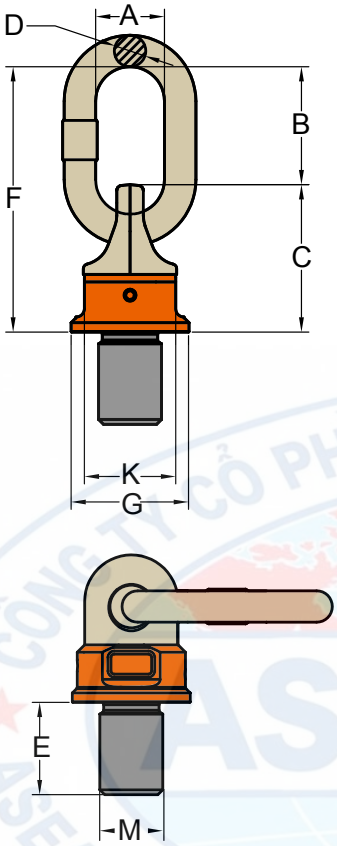


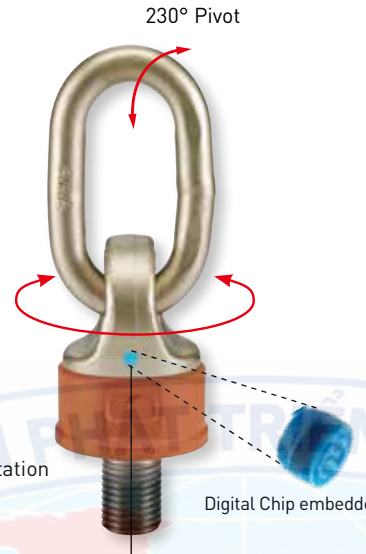

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Pivots to 230°, rotates through 360° due to its unique ball bearing design.
- Manufactured from forged alloy steel, quenched, and tempered.
- Tested in accordance with DNV–ST-0378, EN 1677-1 and EN 1677-4.
- Certified by DNV-ST-0378.
- Individual forged parts and traceability code links to Test Certificate and quality traceability.
- Bolts are Metric thread.
- Design factor 4:1
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Magnaflux crack detection is performed 100% on each batch.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Easy to attach or dismantle due to the forged hexagon shaped body of the DA Swivel Point.
- Capable of rotating under load. Do not turn continuously in 90-degree direction at full load.

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

DA Swivel Point

Metric Thread (DA-271)

DNV-ST-0378
(Offshore and Platform Lifting Appliance)

-20°C

Item No.	Working Load Limit	Thread version			Dimensions (mm)							Torque in	N.W.
		M	E	Pitch	G	C	K	F	D	B	A		
	tonnes	mm	mm	DIN13	mm							Nm	kg
DA-271-003	0.4	M 8	12	1.25	35	40	30	72	8	32	29	10	0.2
DA-271-004	0.6	M10	15	1.50	35	40	30	72	8	32	29	10	0.2
DA-271-006	0.7	M12	18	1.75	40	45	36	95	10	50	35	10	0.3
DA-271-013	1.5	M16	24	2.00	46	54	41	104	13	50	36	30	0.5
DA-271-020	2.5	M20	30	2.50	62	68	55	122	13	54	36	70	1.0
DA-271-035	4.0	M24	36	3.00	78	88	70	154	19	66	41	150	2.2
DA-271-060	6.0	M30	45	3.50	90	120	80	206	22	86	50	350	4.5
DA-271-080	10.0	M36	54	4.00	90	120	80	206	22	86	50	410	4.6
DA-271-120	13.0	M42	63	4.50	98	122	84	235	25	110	67	550	5.5
DA-271-130	14.0	M48	72	5.00	98	122	84	235	25	110	67	550	6.1
DA-271-140	20.0	M52	78	5.00	120	150	94	270	32	120	72	750	10.5
DA-271-160	20.0	M56	84	5.50	120	150	94	270	32	120	72	800	10.7
DA-271-161	20.0	M64	96	6.00	120	150	94	270	32	120	72	800	11.6

* Design Factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.