
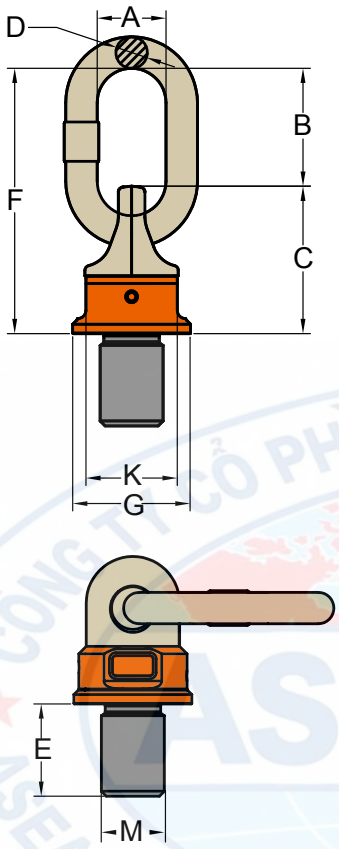


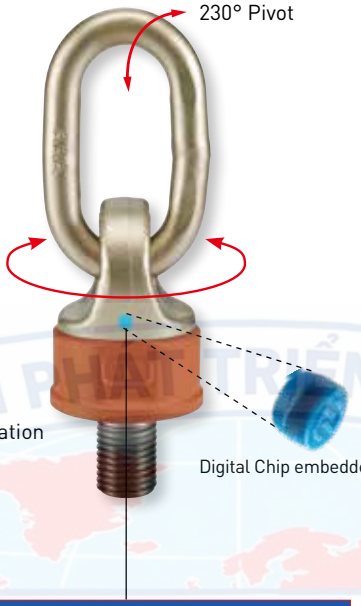

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Pivots to 230°, rotates through 360° due to its unique ball bearing design.
- Manufactured from forged alloy steel, quenched, and tempered.
- Tested in accordance with DNV–ST-0378, EN 1677-1 and EN 1677-4.
- Certified by DNV-ST-0378.
- Individual forged parts and traceability code links to Test Certificate and quality traceability.
- Bolts are UNC thread.
- Proof tested to 2.5 times the WLL.
- Design factor 4:1
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Magnaflux crack detection is performed 100% on each batch.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Easy to attach or dismantle due to the forged hexagon shaped body of the DA Swivel Point.
- Capable of rotating under load. Do not turn continuously in 90-degree direction at full load.

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

DA Swivel Point

UNC Thread (DA-272)

DNV-ST-0378
(Offshore and Platform Lifting Appliance)

-20°C

Item No.	Working Load Limit	Thread version			Dimensions (inch)							Torque in	N.W.
		M	E	TPI	G	C	K	F	D	B	A		
	lbs	inch	inch		inch							ft-lbs	lbs
DA-272-006	1,550	1/2	0.75	13UNC	1.57	1.77	1.42	3.74	0.39	1.97	1.38	7	0.7
DA-272-013	3,300	5/8	0.94	11UNC	1.81	2.13	1.61	4.09	0.51	1.97	1.42	20	1.2
DA-272-018	4,400	3/4	1.13	10UNC	1.81	2.68	1.61	4.09	0.51	1.97	1.42	20	1.2
DA-272-020	5,500	7/8	1.31	9UNC	2.44	2.68	2.17	4.80	0.51	2.13	1.42	50	2.2
DA-272-035	8,800	1	1.50	8UNC	3.07	3.46	2.76	6.06	0.75	2.60	1.61	110	4.8
DA-272-060	13,200	1 1/4	1.88	7UNC	3.54	4.72	3.15	8.11	0.87	3.39	1.97	250	9.9
DA-272-080	22,000	1 1/2	2.25	6UNC	3.54	4.72	3.15	8.11	0.87	3.39	1.97	300	10.0
DA-272-120	28,600	1 3/4	2.63	5UNC	3.86	4.80	3.31	9.25	0.98	4.33	2.64	400	12.1
DA-272-130	30,800	2	3.00	4.5UNC	3.86	4.80	3.31	9.25	0.98	4.33	2.64	400	13.5
DA-272-140	44,000	2 1/4	3.38	4.5UNC	4.72	5.91	3.70	10.63	1.26	4.72	2.85	550	23.1
DA-272-160	44,000	2 1/2	3.75	4UNC	4.72	5.91	3.70	10.63	1.26	4.72	2.85	590	23.5

* Design Factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.