


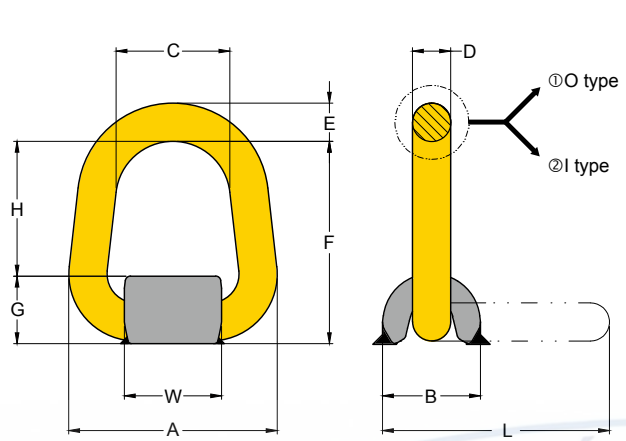


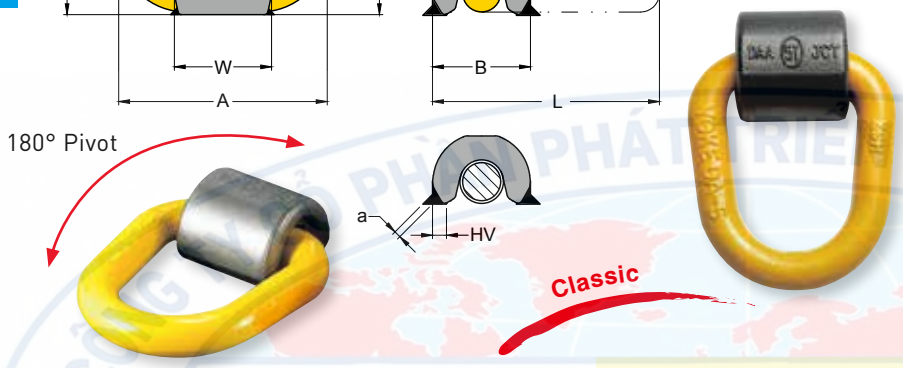



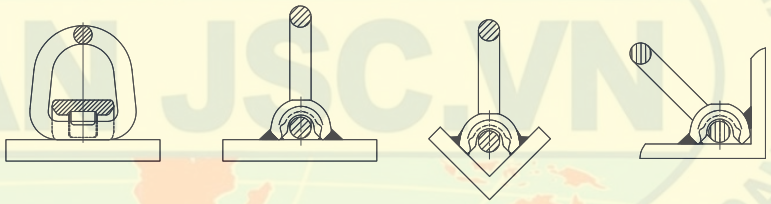

- Pivots through 180°.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN 1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Proof tested to 2.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- WLL forged onto each product for quick and easy identification.
- Lugs designed to assist the welding process.
- Never apply load except in the same direction with the pivot direction.

Classic Weld-on Point

without Spring Designed

Metric (8-0573)

	Item No.	Working Load Limit	Dimensions (mm)												N.W.
		tonnes*	A	B	C	D	E	F	G	H	L	W	HV	a	kg
①	8-0573-01	1.0	83	37	48	14	14	84	25	59	108	46	5	3	0.5
①	8-0573-03	3.0	98	48	58	17	17	84	31	53	114	54	6	3	0.9
①	8-0573-05	5.0	120	57	66	22	22	117	39	78	154	56	7	3	1.3
①	8-0573-08	8.0	121	68	68	26	26	120	47	73	166	55	10	4	2.4
②	8-0573-10	10.0	146	68	82	20	30	139	47	92	189	70	10	4	2.8
②	8-0573-20	20.0**	186	93	100	25	37	175	70	105	234	91	20	4	6.5
②	8-0573-30	30.0**	254	116	150	35	45	241	84	157	317	127	20	4	17.2

* Design factor 5:1

** Design factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.