




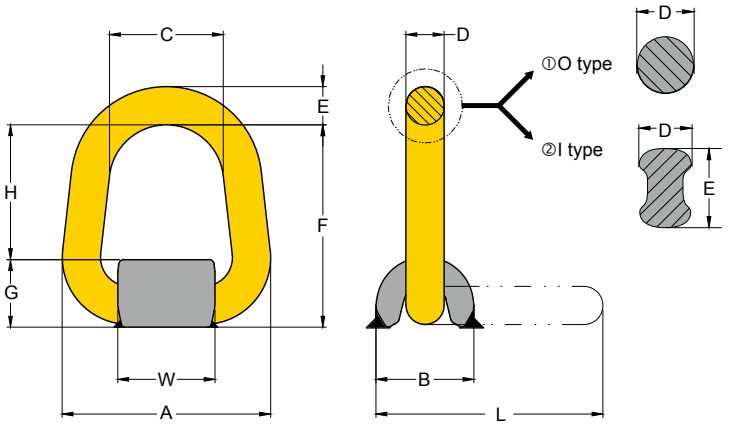

Stop at Any Angle

- Pivots through 180°.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN 1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Proof tested to 2.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- WLL forged onto each product for quick and easy identification.
- Lugs designed to assist the welding process.
- A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations.
- Never apply load except in the same direction with the pivot direction.

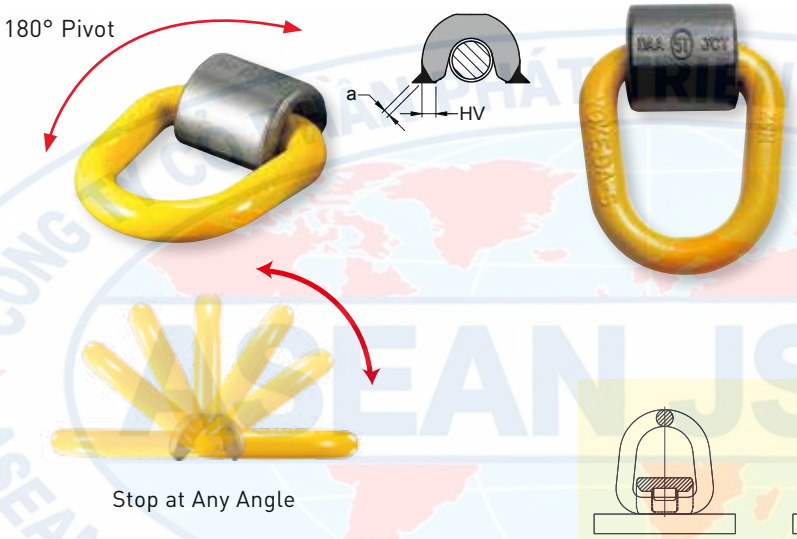

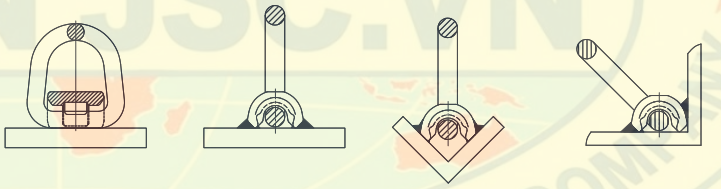

Weld-on Point

Designed with spring, stop at any angle

Metric (8-057)

	Item No.	Working Load Limit	Dimensions (mm)												N.W.
		tonnes*	A	B	C	D	E	F	G	H	L	W	HV	a	kg
①	8-057-1T	1.0	83	41	48	14	14	86	27	58	109	50	5	3	0.5
①	8-057-3T	3.0	98	48	58	17	17	85	31	54	114	58	6	3	0.9
①	8-057-5T	5.0	120	63	66	22	22	118	41	77	157	64	7	3	1.3
①	8-057-8T	8.0	121	73	68	26	26	122	53	69	169	60	10	4	2.6
②	8-057-10T	10.0	146	73	82	20	30	141	53	88	191	75	10	4	2.8

* Design factor 5:1

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT