
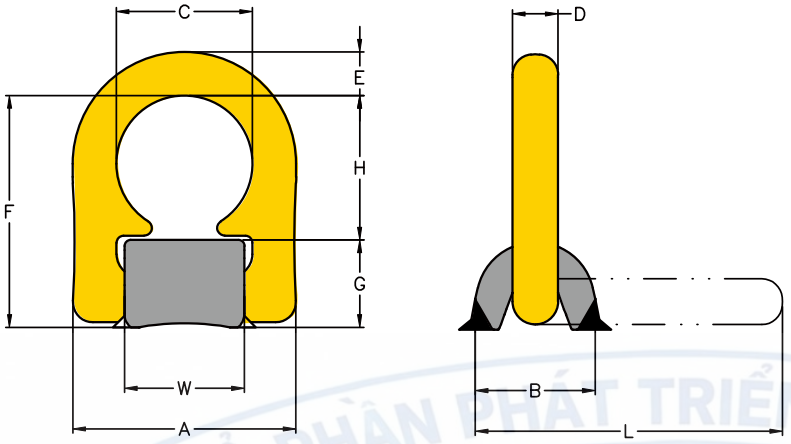


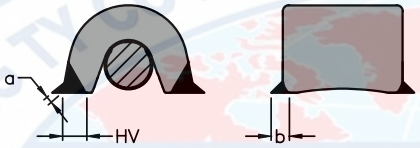


Stop at Any Angle

- Load ring pivots 180°.
- Full Loading Capacity in all directions.
- Manufactured from forged alloy steel, quenched and tempered.
- Tested in accordance with EN 1677-1.
- 100% magnaflux crack detected.
- Parts individually forged with batch code to ensure full traceability.
- The permitted WLL forged onto each product for quick and easy identification.
- Lugs designed to assist the welding process.
- A protected spring keeps the loading ring in the required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations.

# Super Weld-on Point

## Metric (8-0575)

| Item No. | Working Load Limit | Dimensions (mm) | | | | | | | | | | | | | N.W. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | tonnes* | A | B | C | D | E | F | G | H | L | W | HV | a | b | kg |
| 8-0575-015 | 1.5 | 64 | 31 | 38 | 13 | 13 | 63.0 | 24 | 39 | 84 | 32 | 5 | 3 | 3 | 0.3 |
| 8-0575-025 | 2.5 | 74 | 39 | 45 | 16 | 15 | 75.0 | 28 | 47 | 98 | 39 | 8 | 3 | 3 | 0.5 |
| 8-0575-040 | 4.0 | 84 | 40 | 51 | 16 | 17 | 81.0 | 29 | 52 | 108 | 45 | 9 | 3 | 3 | 0.7 |
| 8-0575-067 | 6.7 | 110 | 60 | 67 | 23 | 22 | 115.0 | 43 | 72 | 152 | 59 | 12 | 4 | 4 | 1.7 |
| 8-0575-100 | 10.0 | 122 | 70 | 67 | 27 | 22 | 122.3 | 51 | 71 | 164 | 59 | 17 | 5 | 7 | 2.5 |
| 8-0575-160 | 16.0 | 180 | 92 | 100 | 26 | 32 | 172.0 | 66 | 106 | 228 | 89 | 25 | 6 | 8 | 6.3 |

* Design factor 4:1

**WARNING**
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT



Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.