



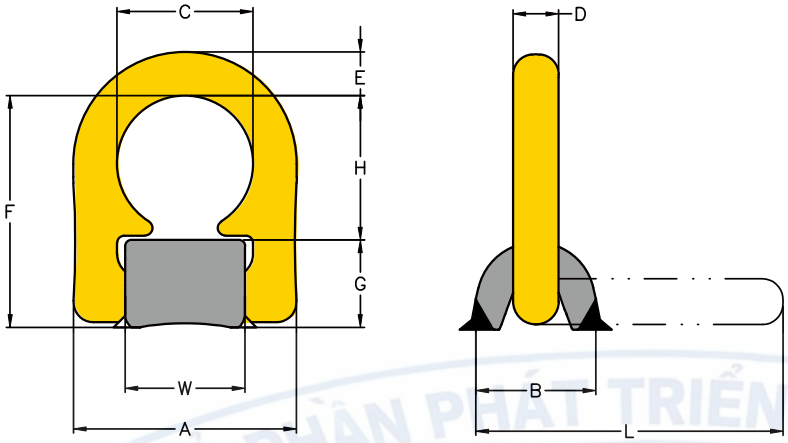

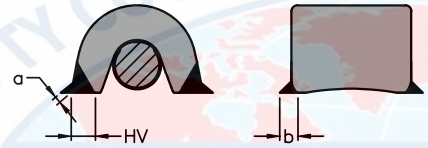

Stop at Any Angle

- Lashing ring pivots 180°
- Full Lashing Capacity in all directions.
- Manufactured from forged alloy steel, quenched and tempered.
- Tested in accordance with EN 1677-1.
- 100% magnaflux crack detected.
- Parts individually forged with batch code to ensure full traceability.
- The permitted lashing capacity "LC" in daN forged onto each product for quick and easy identification.
- Lugs designed to assist the welding process.
- A protected spring keeps the lashing ring in the required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations.

Lashing Weld-on Point

Metric (8-0576)

Item No.	Lashing Capacity	Dimensions (mm)													N.W.
	daN*	A	B	C	D	E	F	G	H	L	W	HV	a	b	kg
8-0576-030	3,000	64	31	38	13	13	63	24	39	84	32	5	3	3	0.3
8-0576-050	5,000	74	39	45	16	15	75	28	47	98	39	8	3	3	0.5
8-0576-080	8,000	84	40	51	16	17	81	29	52	108	45	9	3	3	0.7
8-0576-134	13,400	110	60	67	23	22	115	43	72	152	59	12	4	4	1.7
8-0576-200	20,000	122	70	67	27	22	122	51	71	164	59	17	5	7	2.5
8-0576-320	32,000	180	92	100	26	32	172	66	106	228	89	25	6	8	6.3

* Design factor 2:1

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT