





- Quenched and Tempered Alloy Steel.
- At least 25% greater WLL than traditional G80 products.
- Manufactured in accordance with EN 1677 and ASTM A952/ A 952M.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.
- Design Factor 4:1.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature at a minimum of 400°C.
- Each link is marked with batch number that links to the test certificate with full traceability to raw materials.
- Fully integrated shortening clutch and master link.
- No reduction in WLL when shortening chain.
- Speedy assembly.
- Light weight system.
- Cost effective compared to slings which use multiple components.

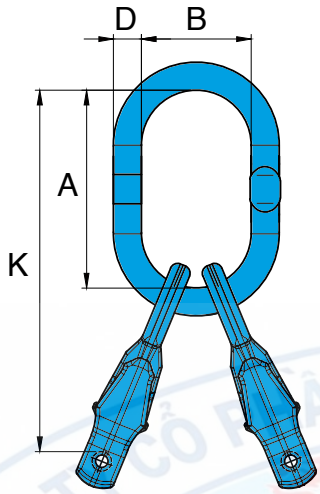

Asymmetric Lifting

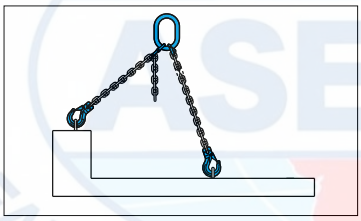



Adjustable Master Link, 2-Leg

Item No.	WLL β 0-45°	For Grade 100 Chain	Used to single hook according to DIN 15401 NO.	Dimensions (mm)				N.W.
	tonnes	mm		D	A	B	K	kg
X-A05-06	2.0	6	4.0	13	120	70	196	0.9
X-A05-08	3.5	7,8	6.0	19	160	95	262	2.2
X-A05-10	5.6	10	10.0	22	170	105	295	3.8
X-A05-13	9.4	13	10.0	28	190	110	348	7.0
X-A05-16	14.0	16	12.0	32	230	130	432	13.6

* Design factor 4:1 proof tested and certified.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.