


- Quenched and Tempered Alloy Steel.
- At least 25% greater WLL than traditional G80 products.
- Manufactured in accordance with DIN PAS 1061,EN 1677 and ASTM A952/ A 952M.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.
- Design Factor 4:1.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature at a minimum of 400°C.
- Each link is marked with batch number that links to the test certificate with full traceability to raw materials.
- Fully integrated shortening clutch and master link.
- No reduction in WLL when shortening chain.
- Speedy assembly.
- Light weight system.
- Cost effective compared to slings which use multiple components

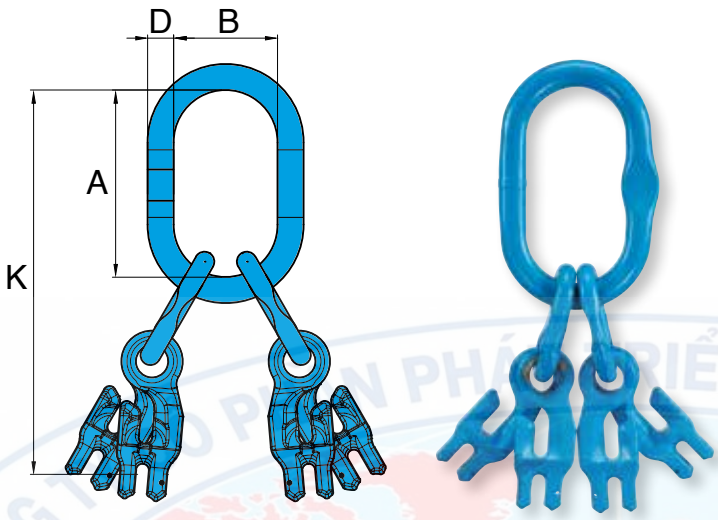

Adjustable Master Link, 4-Leg

Item No.	WLL β 0-45°	For Grade 100 Chain	Used to single hook according to DIN 15401 NO.	Dimensions (mm)				N.W.
	tonnes	mm		D	A	B	K	kg
X-A06-06	2.9	6	6.0	19	160	95	290	2.4
X-A06-08	5.3	7,8	10.0	22	170	105	342	4.6
X-A06-10	8.4	10	10.0	28	190	110	400	8.1
X-A06-13	14.1	13	12.0	32	230	130	503	15.8
X-A06-16	21.0	16	20.0	36	275	150	617	28.9

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT