



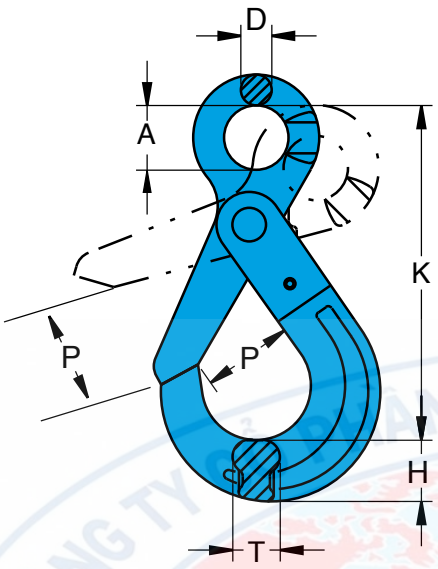

- Quenched and Tempered Alloy Steel.
- At least 25% greater WLL than traditional G80 products.
- Manufactured in accordance with EN 1677- 3 and ASME B30.26, ASME B30.10.
- Certified by DGUV GS-OA-15-05.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.
- Design Factor 4:1.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100% on each batch.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

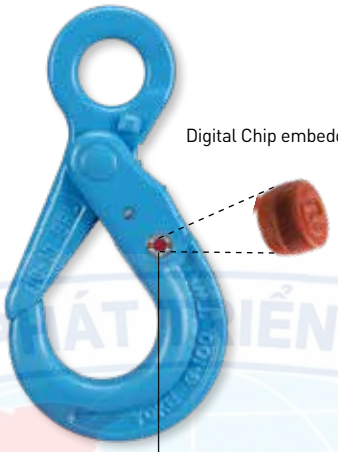

G-100 Eye Self Locking Hook

Item No.	For Grade 100 Chain	Working Load Limit	Dimensions (mm)						N.W.
	mm	tonnes*	A	D	H	K	P	T	kg
X-025-06	6	1.40	21	10	19	110	28	15	0.5
X-025-07	7,8	2.50	25	11	24	136	34	20	0.8
X-025-10	10	4.00	32	13	30	167	44	26	1.5
X-025-13	13	6.70	40	16	39	207	51	30	3.0
X-025-16	16	10.00	50	21	49	252	60	36	5.8
X-025-20	20	16.00	60	23	65	293	70	48	10.0
X-025-22	22	19.00	70	24	63	319	80	49	12.5
X-025-26	26	26.50	80	25	69	343	99	56	15.0
X-025-28	28	31.25	92	28	81	405	123	63	23.1

* Design factor 4:1 proof tested and certified.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT