CR SOCKET STANDARD

Material	:	Cast steel - Grade R3S
Working Load Limit	:	20% of the MBL
Finish	:	Painted or Galvanised
Temperature Range	:	-40°F up to 392°F
Standard Certification	:	Certificate of Conformity 3.1 Material Certificate EN 10204 Proof Load Certificate[1] ABS Type Approval[2]


TYPE APPROVED PRODUCT DNV

CR sockets give the best possible connection between a chain and a rope anchoring system.

These sockets include our non-rotating system (NRS-system) which prevents the tamp from turning or slipping out of the cone and guarantees a high performance connection.

Non-standard sizes or custom products available on request.



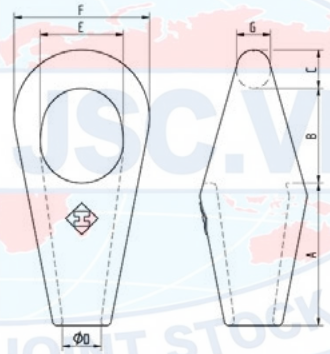

NR.	Rope Ø	Article number		MBL	A	B	C	ØD	E	F	G	Weight
	inch	painted RAL 5013 blue	galvanised	USt	inch							lbs
512	1 ¼ - 1 ⅜	CR512P	CR512G	154,3	5 ½	3 5/16	1 ½	1 ½	3	4 29/32	1 7/16	15,4
517	1 ½ - 1 ⅝	CR517P	CR517G	176,4	6 5/16	4 5/16	1 23/32	1 23/32	3 5/8	5 29/32	1 ½	24,3
519	1 ¾ - 1 ⅞	CR519P	CR519G	220,5	7 7/16	5	2	2	4 5/16	7 ⅛	1 13/16	39,7
522	2 - 2 ⅛	CR522P	CR522G	275,6	8 ½	4 29/32	2 7/32	2 7/32	4 ½	7 29/32	2	55,1
524	2 ¼ - 2 ⅜	CR524P	CR524G	330,7	9 ⅛	5 23/32	2 5/8	2 ½	5 5/16	9 ⅛	2 7/32	77,2
526	2 ½ - 2 ⅝	CR526P	CR526G	440,9	9 13/16	6 5/16	3	2 29/32	6 5/16	10 5/16	2 5/8	112,4
527	2 ¾ - 2 ⅞	CR527P	CR527G	551,2	11	5 29/32	3 ⅛	3 ⅛	6 23/32	10 29/32	2 13/16	136,7
528	3 - 3 ⅛	CR528P	CR528G	661,4	12 7/16	8 5/16	3 5/16	3 7/16	7 7/32	11 13/16	3	165,3
529	3 ¼ - 3 ⅜	CR529P	CR529G	771,6	13 7/16	8 ⅛	3 29/32	3 5/8	8	12 5/8	3 ½	205
530	3 ½ - 3 ⅝	CR530P	CR530G	881,8	14 7/32	8 23/32	4 ⅛	3 29/32	8 ½	13 7/16	3 23/32	242,5
531	3 ¾ - 4	CR531P	CR531G	992,1	15	9 7/16	4 5/16	4 5/16	9 7/32	14 13/16	3 29/32	310,9
533	4 ¼ - 4 ½	CR533P	CR533G	1102,3	17 23/32	10 7/32	4 29/32	4 23/32	9 29/32	15 23/32	4 5/16	410,1
540	5	CR540P	CR540G	1377,9	20 7/16	11 ½	5 ½	5 ½	10 13/16	18 ⅛	4 29/32	698,9

[1] Sockets are proof loaded at 40% of the MBL up to an MBL of 875 Mtons.

[2] When ABS Product Certificate for Mooring is required, the test program as given in ABS Offshore Mooring Guide shall be followed.