Plain trolley combination type: dimensions table


TSP combination dimensions (mm)

Capacity (kg)	Code	Operation method	Headroom : C	Cord length : L1 (m)	Pendant hose length : L2 (m)	Applicable rail width : B (mm)	Minimum curve radius (mm)	D	a	b	e	f	g	h	i	j	k	m	n	o	p	q	r	t
250	TCSSP03CS	Cord	410	1.7	-			550								19								
	TCSSP03PS	Pendant		-	2.5																			
	TCRSP03CS	Cord	300	1.7	-			370																
	TCRSP03PS	Pendant		-	2.2							36	25			19.5								
	TCRSP03MS	Hand lever	835	-	-	50 to 102	1100	390	204	182	46			82	60		76	47.5	84	42		54	38	22
490	TCSSP04CS	Cord	410	1.7	-			550								19								
	TCSSP04PS	Pendant		-	2.5																			
	TCRSP04CS	Cord	460	1.9	-			580								14								
	TCRSP04PS	Pendant		-	2.4																10			
980	TCSSP09CD	Cord	445	1.7	-			565																
	TCSSP09PD	Pendant		-	2.5							40												
	TCRSP09CD	Cord	530	1.9	-	58 to 127	1300	595	249	236	56		29	106	71	24	95	56	112	50		69	50	25
	TCRSP09PD	Pendant		-	2.5																			
	TCRSP09CS	Cord	490	1.8	-			605																
	TCRSP09PS	Pendant		-	2.5																			
2t	TCRSP20CD	Cord	560	1.9	-	82 to 153	1500	580	300	280	69	45		127	85	35	112	71	131	63		83	62	31
	TCRSP20PD	Pendant		-	2.4																			
3t	TCHSP30CS	Cord	For more information, including dimensions, please contact Kito.																					
	TCHSP30PS	Pendant																						


•The D dimensions is the value for the standard lift.
•The value described above are the nominal dimensions.




Plain trolley combination type

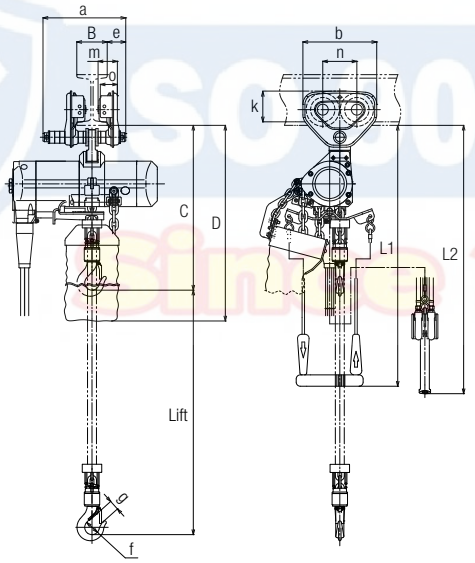

TCS series
(TSP combination)



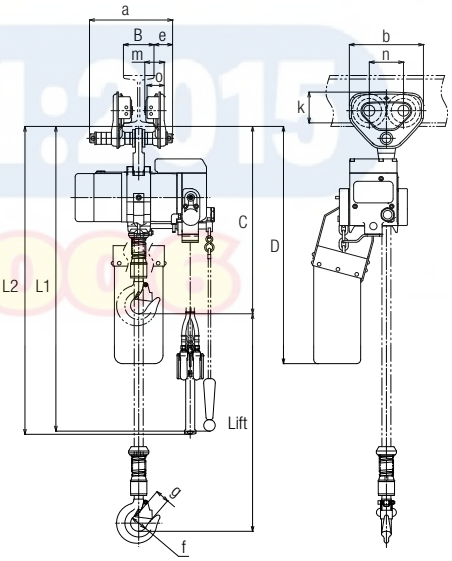

TCR serie
(TSP combination)