HAND WINCH
手动卷扬机


HWG
HWV

FEATURES:
- Encased mechanical parts
- Automatic brake
- Adjstable and dismountable crank
- 2 securing planes horizontal or vertical (according to model)
- Can be unclutched when off-load, whilst impossible to unclutch under load
- Highly rugged design, thanks to the exceptional rigidity of the frame

HAND WINCH FOR USING:
Upgrade, a wire transfer, loading and unloading heavy objects, etc.

HWV




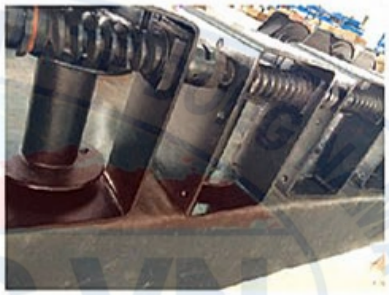



HWG





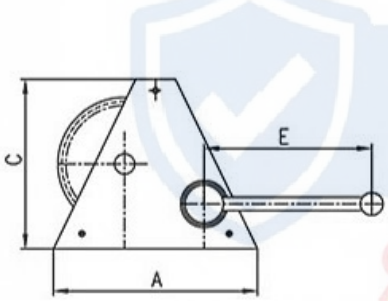



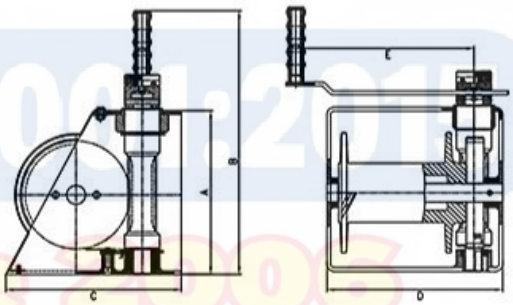

HWG 手动卷扬机 HWG HAND WINCH

Model	GR150	GR300	GR500	GR1000	GR2000
S.W.L(kg)	150	300	500	1000	2000
For wire rope(mm)	4	5	6.3	9.3	13
Length(m)	22	40	20	35	30
Number of layers	6	6	4	4	4
N.W(kg)	5.5	16.9	18.8	38	68.4
A(mm)	180	240	240	412	500
B(mm)	325	385	385	485	585
C(mm)	150	200	200	300	325
D(mm)	150	200	200	300	405
E(mm)	350	250	250	350	350
Φx(mm)	4x22	5x40	6.8x20	9x35	13x30
Drive ratio	2.84:1	6.67:1	7.75:1	23.75:1	43.7:1
4xΦ	4xΦ9	4xΦ13	4xΦ13	4xΦ17	4xΦ21

HWV 手动卷扬机 HWG HAND WINCH

Model	VS250	VS500	VS1000	VS2000
S.W.L(kg)	250	500	1000	2000
For wire rope(mm)	5	6.3	9.3	13
Length(m)	20	25	35	30
Number of layers	4	4	4	4
N.W(kg)	10	17	30.5	70
A(mm)	150	180	300	340
B(mm)	330	360	490	534
C(mm)	150	180	300	340
D(mm)	200	260	300	395
E(mm)	240	240	350	380
Φx(m)	5x20	6.8x25	9x35	13x30
Drive ratio	15：1	21：1	26：1	86.67：1
4xΦ	4xΦ11	4xΦ13	4xΦ17	4xΦ22