FORGED MASTER LINK
美标80级锻造强力环

SLR091-G80



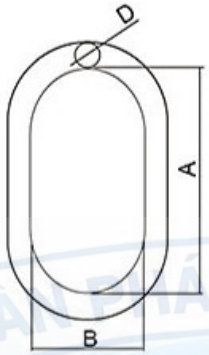

Introduction:

Forged master link are mainly used in electric power, metallurgy, petroleum, chemical, machinery, railway, ports, mining, construction and other businesses on the lifting and hoisting, or chain, wire rope, double buckles, hooks, and other accessories Sling.



Item No.	Weight (kg)	Chain 80	WII 1 Leg (T)	WII 2 Leg -45° (T)	WII Rope (T)	DIMENSIONS (mm) A	B	D
8-SLR-91-1/2	0.36	1/4	1.5	2.12	3.4	127±6	63.5±5	13±1
		5/16	2	2.8				
8-SLR-91-5/8	0.7	5/16	2	2.8	4	152±6	76±5	16±1
		3/8	3.15	/				
8-SLR-91-3/4	0.93	3/8	3.15	4.25	5.6	140±6	70±5	19±1
8-SLR-91-7/8	1.5	3/8	3.15	4.25	6.9	160±6	90±5	22±1
		1/2	5.3	/				
8-SLR-91-1	2.1	1/2	5.3	7.5	11.8	178±6	89±5	25±1
		5/8	8	11.2				
8-SLR-91-1-1/4	4.24	5/8	8	11.2	17.7	222±7	111±6	32±1/-2
		3/4	11.2	16				
8-SLR-91-1-1/2	7.17	3/4	11.2	16	27.7	267±7	135±6	38±1/-2
		7/8	15	21.2				
8-SLR-91-1-3/4	11.55	7/8	15	21.2	38.5	305±10	152±6	45±1/-2
		1	21.2	/				
8-SLR-91-2	17.2	1	21.2	30	46.9	355±10	178±6	51±1/-2
		11/4	31.5	/				
8-SLR-91-2-1/4	24.5	11/4	31.5	45	64.9	406±10	203±7	57±1/-2
8-SLR-91-2-1/2	30.9	/	/	/	72.6	406±10	203±7	63.5±3
8-SLR-91-2-3/4	39.5	/	/	/	98.4	406±10	241±7	70±3
8-SLR-91-3	50.34	/	/	/	103	457±15	228±7	76±3
8-SLR-91-3-1/4	65.68	/	/	/	119	508±15	254±7	82.5±3
8-SLR-91-3-1/2	90.24	/	/	/	126	610±15	305±10	89±3
8-SLR-91-3-3/4	89.27	/	/	/	152	508±15	254±7	95±3
8-SLR-91-4	103.43	/	/	/	169	508±15	254±7	102±3