
BC-(E) • CC-(E)
C CLAMP

▶ Features
- Quick tightening handle.
- The final turn of the hexagonal head with a wrench ensures an even securer tightening.

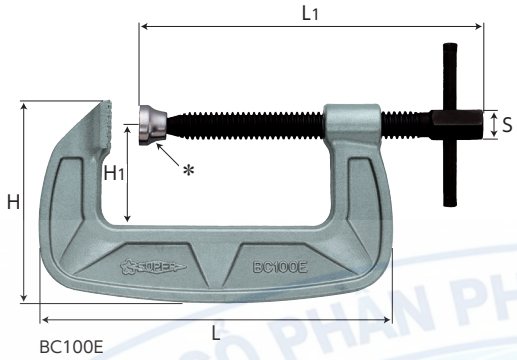


BC100E

Bahco type clamp

Metallic grey baking finish

Item No.	Clamp range(mm)	Size(mm) L	L1	H	H1	S	Guaranteed load (kN)	N.W. (kg)
BC25E	25	78	80	60	26	12	18	0.2
BC38E	38	99	98	69	31		20	0.3
BC50E	50	118	118	78	36	14	21.8	0.45
BC75E	75	157	152	96	46	17	27.3	0.8
BC100E	100	197	190	114	56		34.3	1.3
BC125E	125	237	225	131	66	19	39.2	1.7
BC150E	150	276	262	149	76	22	44.1	2.8
BC200E	200	346	324	174	92		49	4.2

* An adaptor (a plate at the end of the screw) can be set.

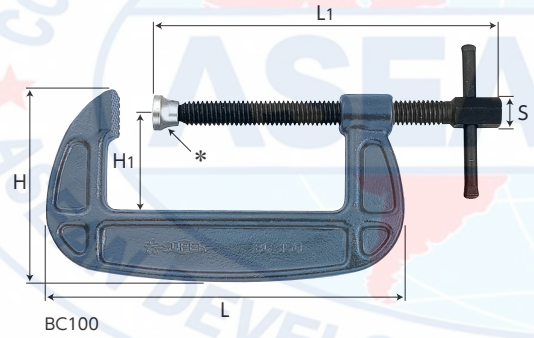

BC100


Bahco type clamp

Cation paint (Excellent rust proofing)

Item No.	Clamp range(mm)	Size(mm) L	L1	H	H1	S	Guaranteed load (kN)	N.W. (kg)
BC25	25	78	80	60	26	12	18	0.2
BC38	38	99	98	69	31	12	20	0.3
BC50	50	116	118	78	36	14	21.8	0.45
BC75	75	157	152	96	46	17	27.3	0.8
BC100	100	197	190	114	56	17	34.3	1.3
BC125	125	237	225	131	66	19	39.2	1.7
BC150	150	276	262	149	76	22	44.1	2.8
BC200	200	346	324	174	92	22	49	4.2
BC250	250	415	386	204	108	27	58.8	7
BC300	300	485	451	230	124	27	68.6	9

* An adaptor (a plate at the end of the screw) can be set.

▶ Features
- Deep throat, heavy duty type.
- Quick tightening handle (removable).
- The final turn of the hexagonal head with a wrench ensures an even securer tightening.

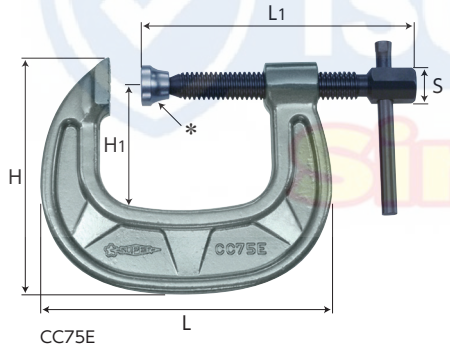


CC75E

C clamp heavy duty wide type


Metallic grey baking finish

Item No.	Clamp range(mm)	Size(mm) L	L1	H	H1	S	Guaranteed load (kN)	N.W. (kg)
CC50E	50	144	138	127	65	19	41.7	1
CC75E	75	182	171	150	80	21	46.6	1.7
CC100E	100	225	208	184	100	23	51.5	2.8
CC125E	125	265	245	215	125	26	56.4	4.1

* An adaptor (a plate at the end of the screw) can be set.

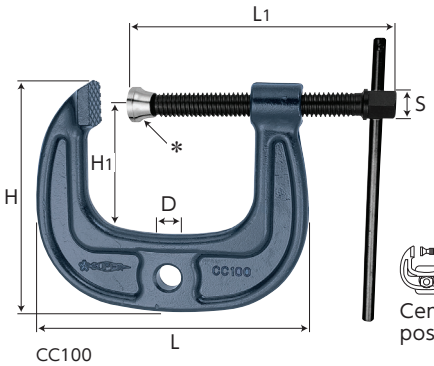

CC100


Center hole for positioning.

C clamp heavy duty wide type

Cation paint (Excellent rust proofing)

Item No.	Clamp range(mm)	Size(mm) L	L1	H	H1	D	S	Guaranteed load (kN)	N.W. (kg)
CC50	50	140	134	116	55	13.1	17	41.7	1.1
CC75	75	182	165	152	80	16.1	19	46.6	1.9
CC100	100	225	201	189	105	20.1	21	51.5	2.9
CC125	125	267	237	225	130	22.1	22	56.4	4.3
CC150	150	310	269	262	155	24.1	24	66.2	6
CC200	200	395	336	335	205	28.1	27	76	12

* An adaptor (a plate at the end of the screw) can be set.