
Connecting Link.

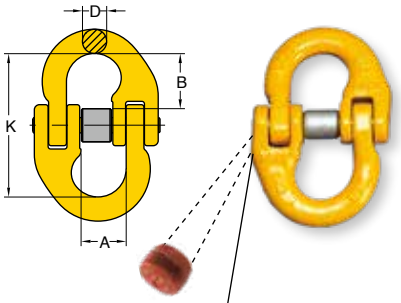


Digital Chip embedded

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)				N.W.
	mm	tonnes*	A	B	D	K	kg
8-015-06	6	1.12	15	17	7	45	0.1
8-015-07	7, 8	2.00	18	22	9	58	0.2
8-015-10	10	3.15	26	27	11	69	0.3
8-015-13	13	5.30	30	37	15	91	0.7
8-015-16	16	8.00	36	39	19	101	1.1
8-015-20	18, 20	12.50	42	46	22	122	1.9
8-015-22	22	15.00	49	59	24	152	3.0
8-015-26	26	21.20	55	63	30	164	5.0
8-015-32	32	31.50	69	79	36	203	9.0

* Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Omega Link.

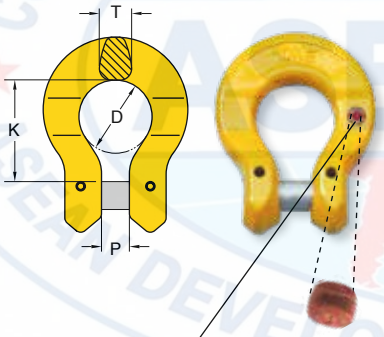


Digital Chip embedded

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)				N.W.
	mm	tonnes*	D	K	P	T	kg
8-018-06	6	1.12	22	29	7	9	0.1
8-018-07	7, 8	2.00	27	36	9	11	0.2
8-018-10	10	3.15	32	44	12	15	0.4
8-018-13	13	5.30	42	55	16	17	0.8
8-018-16	16	8.00	50	69	18	22	1.6
8-018-20	18, 20	12.50	58	81	22	28	2.1

* Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).


Twist Eye Choke Hook.

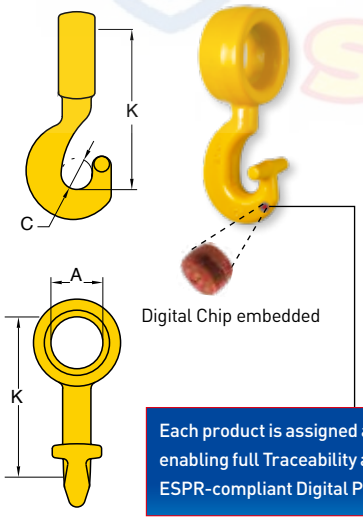

Digital Chip embedded

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)			N.W.
	mm	tonnes*	A	C	K	kg
8-063-07	7, 8	2.00	32	19	95	0.4
8-063-10	10	3.15	41	21	116	0.8
8-063-13	13	5.30	50	27	150	2.0
8-063-16	16	8.00	67	32	185	3.1

* Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677



Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT