
Clevis Sling Hook.

with Latch

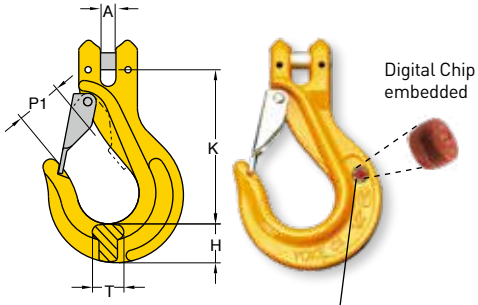


Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)					N.W.
	mm	tonnes*	A	H	K	P1	T	kg
8-043/S-06	6	1.12	7	18	79	23	15	0.3
8-043/S-07	7, 8	2.00	9	22	98	27	18	0.6
8-043/S-10	10	3.15	12	29	121	34	23	1.2
8-043/S-13	13	5.30	15	37	147	44	30	2.3
8-043/S-16	16	8.00	18	42	166	48	39	3.7
8-043/S-20	18, 20	12.50	21	50	200	56	47	6.5

* Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Eye Sling Hook.

with Latch

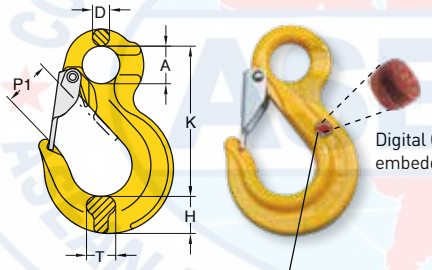


Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)						N.W.
	mm	tonnes*	A	D	H	K	P1	T	kg
8-044/S-06	6	1.12	20	10	19	80	23	17	0.3
8-044/S-07	7, 8	2.00	25	12	22	98	28	20	0.5
8-044/S-10	10	3.15	32	15	30	121	36	23	1.0
8-044/S-13	13	5.30	40	18	38	152	40	28	1.7
8-044/S-16	16	8.00	50	22	45	185	44	32	3.2
8-044/S-20	18, 20	12.50	62	27	49	225	45	46	5.5
8-044/S-22	22	15.00	51	31	62	244	73	52	9.0
8-044/S-26	26	21.20	64	35	77	285	77	61	13.5
8-044/S-32	32	31.50	89	40	80	352	114	65	20.0

* Design factor 4:1 proof tested and certified
Tested acc. to EN 1677


Eye Container Hook.

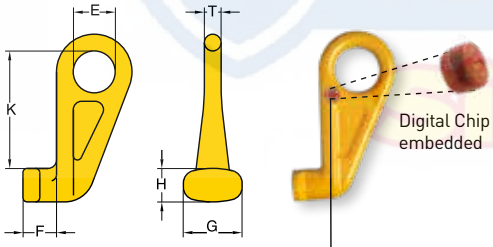

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	Dsc.	Working Load Limit	Dimensions (mm)						N.W.
		tonnes*	E	F	G	H	K	T	kg
8-067-STR	Straight	12.5	70	45	75	48	192	25	3.9
8-067-45LT	Left 45°	12.5	70	45	75	48	192	25	3.9
8-067-45RH	Right 45°	12.5	70	45	75	48	192	25	3.9

* Design factor 4:1 proof tested and certified.

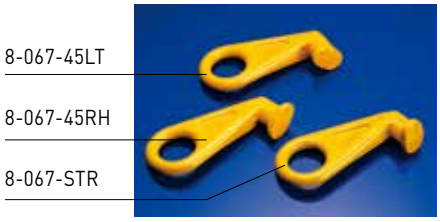



WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.