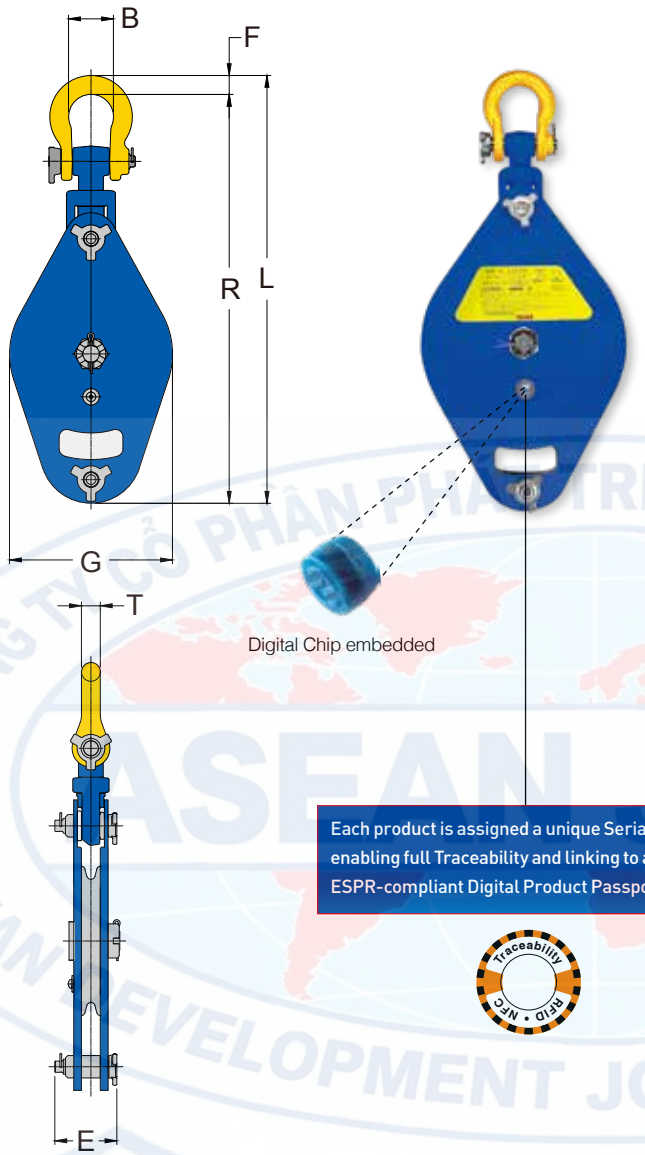


- YOKE Oilfield Hoist Blocks are manufactured of the highest quality alloy steel.
- Available from 4 tonnes to 15 tonnes for wire rope sizes 10mm to 26mm.
- Certified by ABS Type Approval.
- Part number, wire rope size and working load limit are marked on each block.
- Permanent traceability code link to test certificates for easy traceability.
- Supplied with sealed tapered bearings for extended product life and faster line speeds.
- Safety factor 4:1

Oilfield Derrick Block

Item No.	Item No.	Sheave Dia.	Bearing Type	Wire Rope Size	Working Load Limit	Dimensions							
		inch		mm	tonnes	B	E	F	G	L	R	T	N.W.
						mm							lbs
8-591-0408	8-591-0408G	8	**TB	10-13	4	34	82	19	226	550	531	19	35
8-591-0810-13	8-591-0810-13G	10	TB	10-13	8	64	105	32	276	725	693	32	55
8-591-0810-15	8-591-0810-15G	10	TB	13-15	8	64	105	32	276	725	693	32	55
8-591-1214-16	8-591-1214-16G	14	TB	16	12	64	105	32	378	823	791	32	95
8-591-1214-19	8-591-1214-19G	14	TB	19	12	64	105	32	378	823	791	32	95
8-591-1516-22	8-591-1516-22G	16	TB	22	15	80	137	44	433	931	975	39	150
8-591-1516-26	8-591-1516-26G	16	TB	26	15	80	137	44	433	931	975	39	150

* Minimum Ultimate Load is 4 times the Working Load Limit.

** TB: Tapered Bearings

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT