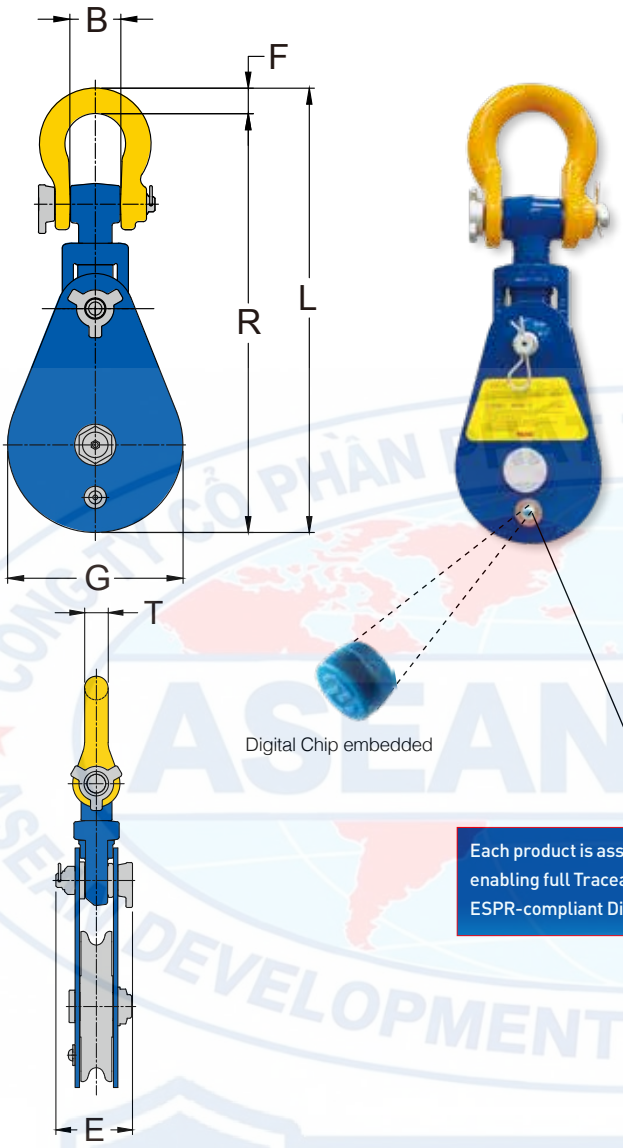


- YOKE Super Snatch Blocks are manufactured of the highest quality tensile steel.
- Available for 20 tonnes, for wire rope sizes 25mm to 29 mm.
- Certified by ABS, CE ,UKCA Type Approval.
- Part number, wire rope size and working load limit are marked on each block.
- Permanent traceability code link to test certificates for easy traceability.
- Supplied with bronze bushings and pressure lube fittings.
- Meets or exceeds all requirements of ASME B30.26.
- Safety factor 4:1
- Fatigue rated

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Super Snatch Block with Shackle

Item No.	Sheave Dia.	Bearing Type	Wire Rope Size	Working Load Limit	Dimensions							N.W.	Replacement Sheave
					B	E	F	G	L	R	T		
	mm		mm	tonnes	mm							kg	
8-551-20	203	**BB	25-29	20	93	156.5	55	216	671	616	51	92	8-500-20
8-551-2010	254	BB	25-29	20	93	156.5	55	280	778	723	51	119	8-500-2010
8-551-2012-25	305	BB	25	20	93	156.5	55	330	833	778	51	139	8-500-2012-25
8-551-2012-29	305	BB	29	20	93	156.5	55	330	833	778	51	139	8-500-2012-29

* Minimum Ultimate Load is 4 times the Working Load Limit.

** BB: Bronze Bushing

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.