




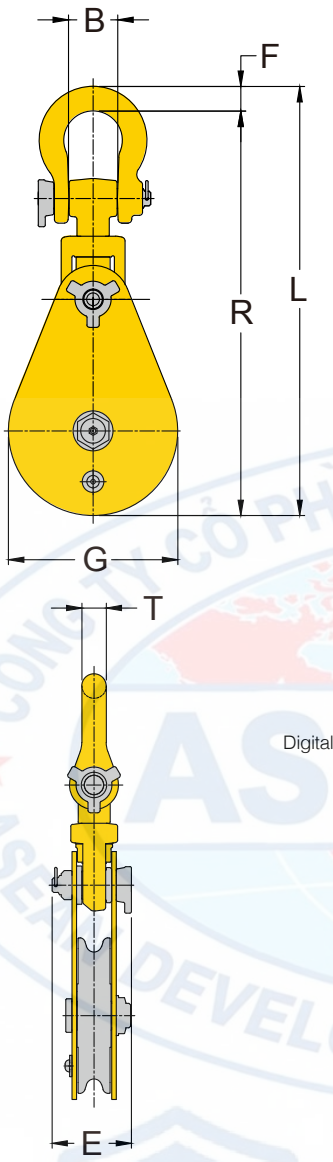

Digital Chip embedded

- YOKE Alloy Snatch Blocks are manufactured of the highest quality alloy steel.
- Available in 12 tonnes, for wire ope sizes 19mm to 22 mm.
- Certified by ABS Type Approval.
- Part number, wire rope size and working load limit are marked on each block.
- Permanent traceability code link to test certificates for easy traceability.
- Supplied with bronze bushings and pressure lube fittings.
- Meets or exceeds all requirements of ASME B30.26.
- Safety factor 4:1
- Fatigue rated

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).



Alloy Snatch Block with Shackle

Item No.	Sheave Dia.	Bearing Type	Wire Rope Size	Working Load Limit	Dimensions							N.W.	Replacement Sheave
					B	E	F	G	L	R	T		
	mm		mm	tonnes	mm							kg	
8-561-12	152	**BB	19-22	12	64	112	32	152	483	451	32	13	8-500-12
8-561-1208	203	BB	19-22	12	64	112	32	220	554	522	32	17	8-500-1208
8-561-1210	254	BB	19-22	12	64	112	32	264	598	566	32	21	8-500-1210

* Minimum Ultimate Load is 4 times the Working Load Limit.

** BB: Bronze Bushing

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.